


Loop Demagnetizers

MAURER
Classic

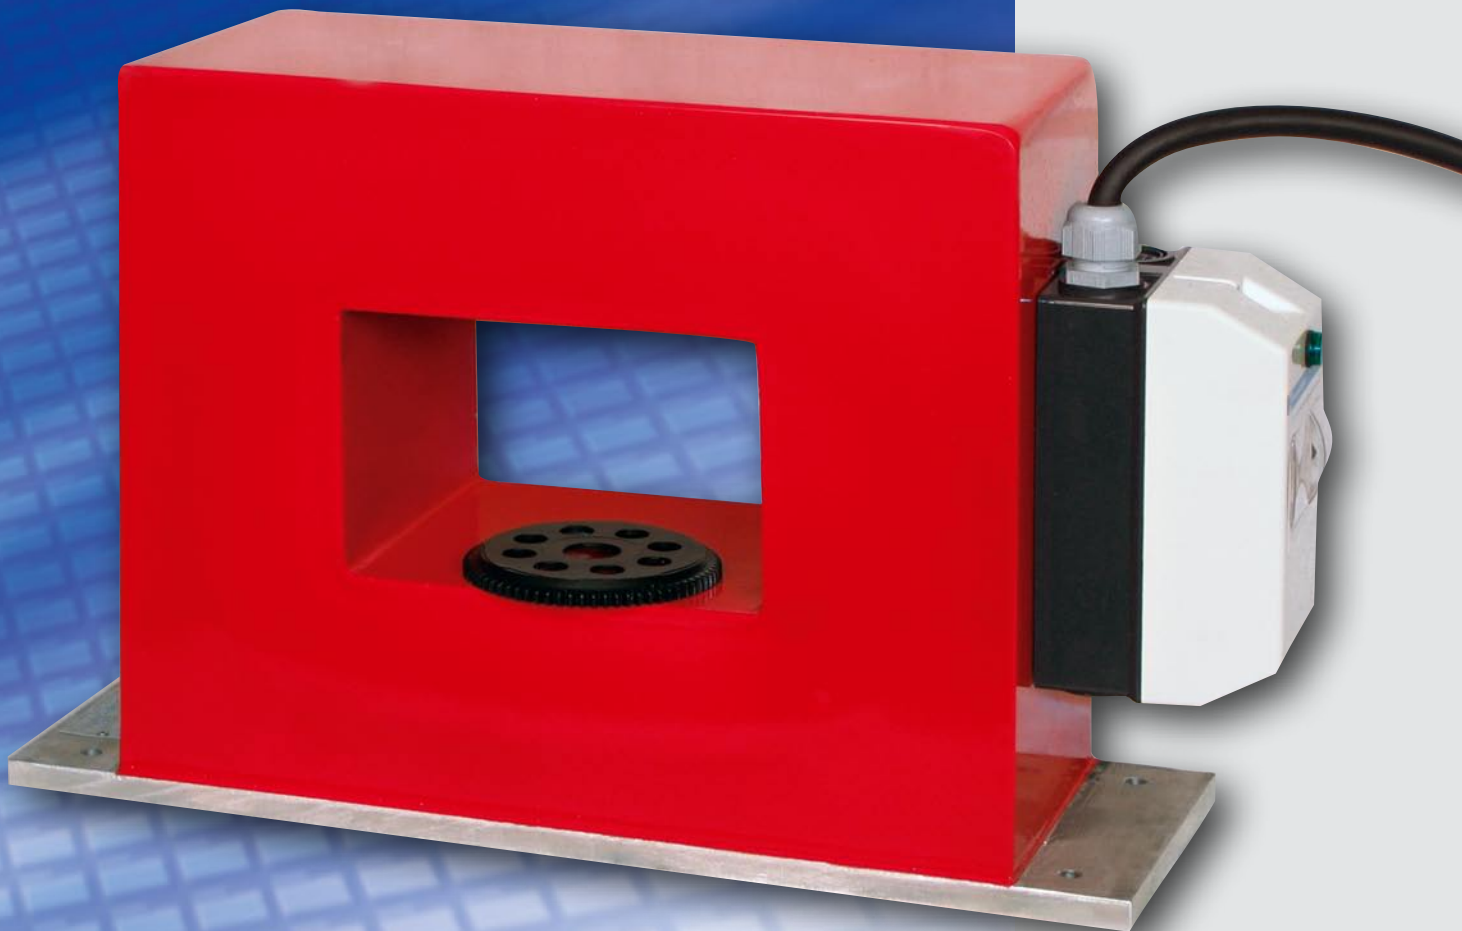

NDT Supply.com, Inc.

7952 Nieman Road
Lenexa, KS 66214-1560 USA

Phone: 913-685-0675, Fax: 913-685-1125
e-mail: sales@ndtsupply.com, www.ndtsupply.com



MAURER[®]
MAGNETIC AG

Reliable loop demagnetizers for industrial use

Characteristics

CT series loop demagnetizers are durable devices based on proven technology. The magnetic parts are drawn slowly (~0.15 m/s) through the coil opening. The parts are demagnetized through removal along the coil axis. The bigger the coil, the greater the magnetic field limit. The material must completely pass outside this field.

- **Sturdy, for shop floor use**
- **Versatile**
- **Particularly suitable for easily alloyed and oblong parts**

These devices reliably demagnetize parts up to a thickness of 20 mm. When short parts are demagnetized, the penetration depth of the field is less than 10 mm. Hard magnetic materials are not demagnetized properly by these devices.

Coil module	CT1	CT2	CT3	CT4	CT5	CT6	CT7	CT8
Dimensions W x H x D [mm] ¹	450x290x150	560x320x170	560x440x190	700x390x230	700x540x230	700x590x230	850x740x350	1050x740x350
Active opening W x D	150x100mm	260x130mm	250x250mm	400x200mm	400x350mm	400x400mm	550x550mm	750x550mm
Maximum field, peak ²	25 kA/m	29 kA/m	20 kA/m	26 kA/m	18 kA/m	17 kA/m	11 kA/m	9 kA/m
Magnetic field limit ³	500 mm	780 mm	1000 mm	1200 mm	1500 mm	1600 mm	2200 mm	2600 mm
Duty cycle	S1, 100%, continuous operation	S1, 100%, continuous operation	S1, 100%, continuous operation	S1, 100%, continuous operation	S1, 100%, continuous operation	S1, 100%, continuous operation	S1, 100%, continuous operation	S1, 100%, continuous operation
Weight	41 kg	62 kg	84 kg	110 kg	120 kg	130 kg	190 kg	230 kg
Connection	230 VAC 50/60 Hz 4.5 A	230 VAC 50/60 Hz 12 A	230 VAC 50/60 Hz 15 A	230 VAC 60 Hz 22 A	230 VAC 50/60 Hz 30.5 A	230 VAC 50/60 Hz 31 A	230 VAC 50/60 Hz 30 A	400 VAC 50/60 Hz 25 A
Protection class IP	54	54	54	54	54	54	54	54
Configuration	threaded	threaded	threaded	threaded	threaded	threaded	threaded	threaded




¹ Approximate


² Divide by 1,41 to obtain RMS value

³ Minimal distance for the removal of the part along the coil axis


CT1

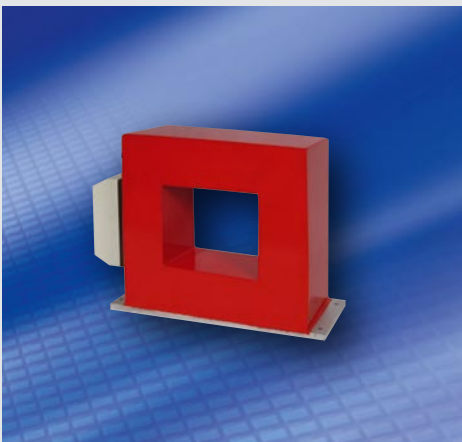

CT3

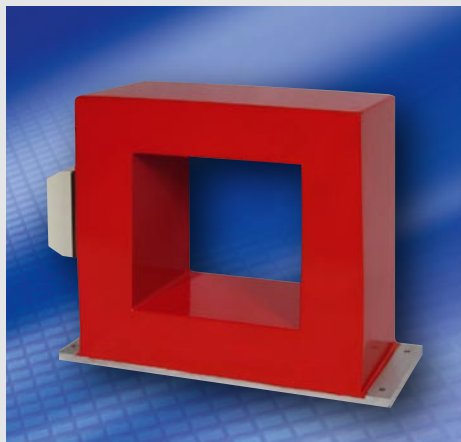

CT5

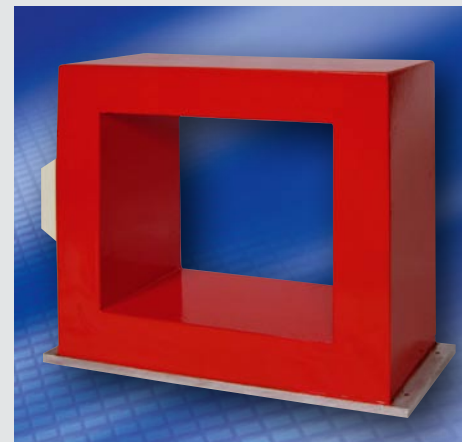

Magnetizing & Demagnetizing Technology



Maurer Magnetic AG

Industriestrasse 8

CH-8627 Grüningen

Phone +41 44 936 60 40

Fax +41 44 936 60 49

info@maurermagnetic.ch

www.maurermagnetic.ch