


A1040 MIRA 3DPRO

High-end Ultimate Ultrasonic Tomograph for quality assessment of concrete structures



- <u>True3D® Tomography</u> three-dimensional FMC / TFM in each instrument position in real time
- <u>A-DPC® Transducers</u> unbeatable penetration depth & sensitivity by the novel low-noise sensor technology
- <u>Open-Crack Sizing</u> unique function for quantitative crack assessment
- **Extendable Aperture** arbitrary aperture configuration by two and more array units
- <u>Variable operation frequency</u> within specified frequency range 10 – 100 KHz
- **INTROVIEW® Pro** Desktop or Laptop software for remote unit control and 3D visualization & analysis of Big Data

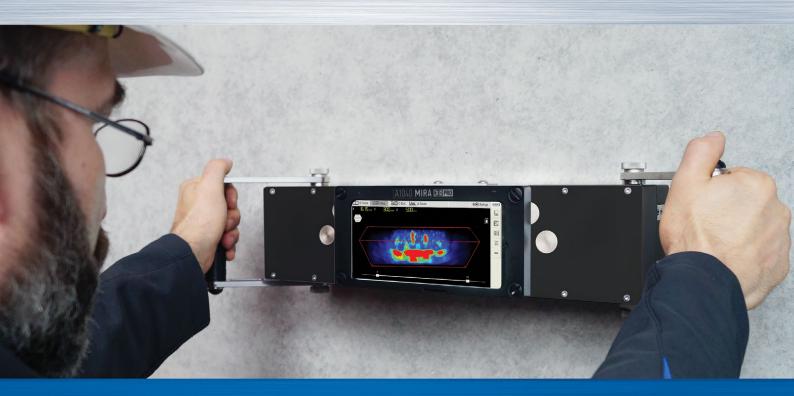

Specification:

Parameter	Value
Configuration of a single A-DPC [®] transducer array (extendable by further arrays)	4 x 16, 8 x 8
Number of parallel DAQ channels	64
Frequency bandwidth, kHz	10 to 100 KHz
Penetration depth (depending on concrete properties)	up to 3 m / 10 ft
Maximal square coverage	10 x 10 m2 / 33 x 33 sq. feet
Frame repetition rate	
• 2D imaging	12 Hz
• 3D imaging	0,3 Hz
Operating time with one battery charge	Up to 10 hours

Special features:

• Real-time 3D Imaging

- Data acquisition in three-dimensional Full-Matrix-Capture mode
- GPU based image reconstruction by 3D Total Focusing Method
- Active Dry-Point-Contact (A-DPC®) transducers with integrated pulserreceived circuit and parallel DAQ
- Deep penetration mode with enhanced transmitter burst energy
- Versatile 2D&3D imaging modes by INTROVIEW® PRO software
- Remote unit control via Tablet-PC or Laptop for stand-alone applications
- Application software for ANDROID & WINDOWS in standard delivery set



3D Software INTROVIEW® Pro:

Volume compilation modes

- Single Scan
- Area Scan
- Panorama B-scan
 & D-Scan

3D view modes:

- ISO-Surface
- Maximum Intensity
 Projection (MIP)

2D view modes:

- Side view (B-, D-Scan)
- Top view (C-Scan)
- Cutting plane
- Gated volume



Delivery set:

MADE IN GERMANY

Name	Quantity, pcs.
Electronic unit with 32 x A-DPC® transducers	2
Tablet-PC with protective case	1
Reference block for regular functional tests	1
Exchangeable Li-Ion battery 18650	12
Type C power supply	2
Data cable USB Type C	2
INTROVIEW® Pro Software with 12 Months Update & Support service	1
Hard case	1
Warranty certificate	1
Operating Manual	1
Screwdriver for battery exchange	2



NDT Supply.com, Inc. 7952 Nieman Road Lenexa, KS 66214-1560 USA



Phone: 913-685-0675, Fax: 913-685-1125 e-mail: sales@ndtsupply.com, www.ndtsupply.com