

CLASSIC SERIES

LED INSPECTION LAMP

CLA-100Z

- ▶ Nominal steady-state UV-A (365 nm) intensity of **5,700 $\mu\text{W}/\text{cm}^2$** at 15 in (38 cm)
- ▶ Low visible light emission—less than 0.5 foot-candle (2.2 lux)

 **Dust Tight & Water Resistant**

 **Fanless & Cool Running**

 **Lightweight & Rugged**

 **Instant-On Operation**

ROCKER SWITCH

Easy on/off operation with rear Rocker switch

RUBBER BUMPER

Protects LED's from damage

LONG-LASTING UV-A LENSES

Equipped with UV-A Pass Filter

ANODIZED ALUMINUM HOUSING

Minimizes corrosion and stands up to years of heavy use

PISTOL GRIP

Comfortable, balanced control



CLASSIC SERIES CLA-100Z

MODEL	NOMINAL STEADY-STATE UV-A INTENSITY at 15 in (38 cm) ①	UV-A COVERAGE AREA at 15 in (38 cm) at minimum 1,200 $\mu\text{W}/\text{cm}^2$	VISIBLE LIGHT MEASUREMENT
CLA-100Z	5,700 $\mu\text{W}/\text{cm}^2$	6 in (15.25 cm)	>350 foot-candle

① UV-A intensity reading taken with the Spectroline® AccuMAX™ Series meter, and is factory set to the value shown. 

Light Source:	2 UV-A LED'S & 1 White LED
Lamp Style:	Cordless lamp
Lamphead Diameter:	4.4 in (11.18 cm)
Length:	6.7 in (17 cm)
Width:	3.4 in (8.6 cm)
Height:	7.45 in (18.9 cm)
Weight:	2.05 Lb (930 g) (with internal battery)
Power Requirements:	90 - 270 VAC, 50 TO 60 Hz
Run Time:	7 to 8 hours (continuous)
Charge Time:	2 hours

CLA-100Z


Classic Series Dual Function LED Inspection Lamp Kit

Comes complete with Classic Series Dual Function LED Inspection Lamp with lanyard, Smart Charger Power Supply, AC Cord set, UV Absorbing Spectacles, Carrying Case For Spectacles, Protective Carrying Case.




UV-A Beam Profiles

Surface Contour Profile at 15 in (38 cm)

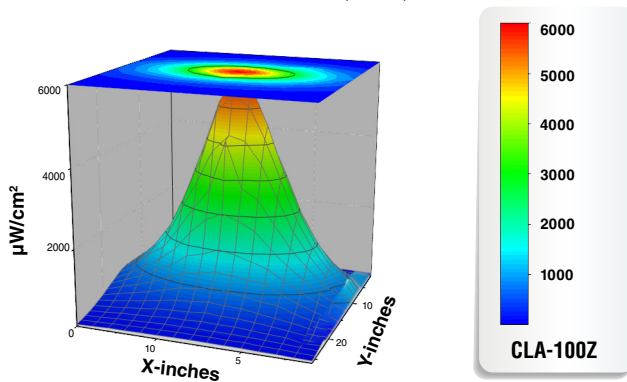

Top Intensity Profile at 15 in (38 cm)

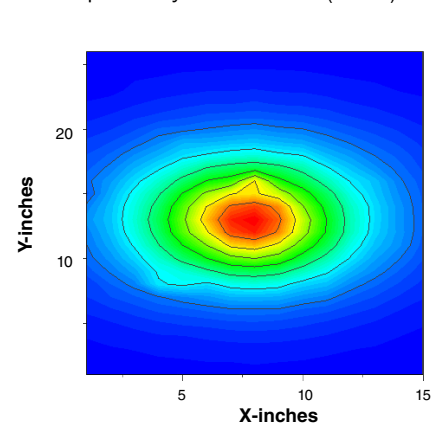

NDT Supply.com, Inc.
7952 Nieman Road
Lenexa, KS 66214-1560 USA

Phone: 913-685-0675, Fax: 913-685-1125
e-mail: sales@ndtsupply.com, www.ndtsupply.com



NDT
5/22 A5202022
PRINTED IN USA