
# **CarestreamNDT**

## INDUSTREX HPX-PRO Digital System

The INDUSTREX HPX-PRO Digital System is built for extreme portability into rugged imaging environments and improved productivity in field imaging applications. This CR system is a lightweight, portable imaging solution that is quick to deploy and rapidly produces high-quality images.



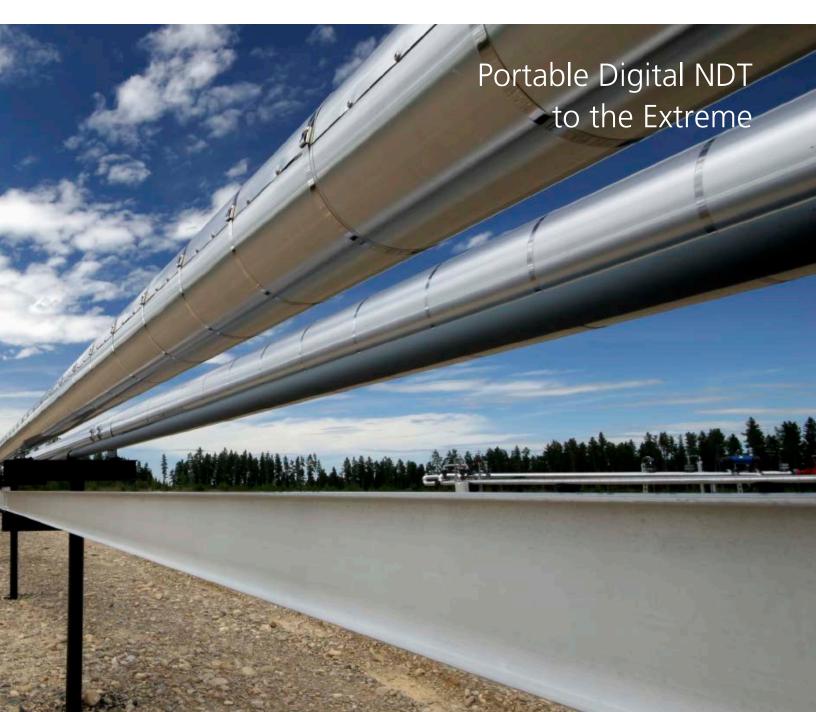

### **HPX-PRO Portable Digital CR System**

The HPX-PRO CR System is built for extreme portability in rugged environments and improved productivity in the field. It's a lightweight CR imaging solution that is quick to deploy and produce high-quality images utilizing a single-pass scan/erase protocol.

With INDUSTREX Digital Viewing Software, the HPX-PRO is designed to get you set-up and imaging fast, with batch mode capability to keep up-to-speed with extreme process conditions like pipeline imaging. From hardware to software, to deep in the field and instant image sharing, the HPX-PRO is a complete system, designed to keep you moving down the line.



#### Built from the Ground Up Specifically for NDT in Mobile Environments

#### **Flexible Imaging for Speed or Quality**

Pixel Pitch: 25  $\mu$ m, 50  $\mu$ m and 100  $\mu$ m operation Spatial Resolution: 60  $\mu$ m (8.33 lp/mm)

## A Complete Workflow Improvement Tool from Start-to-Finish

The HPX-PRO handles a wide range of imaging extremes and is designed to set up fast, operate simply, and deliver the quick results – from the first shot to the final report. At the end of the day upload digital images and reports to the network or e-mail to customers.

#### **Rapid Job Setup**

With INDUSTREX Software setup with customer parameters, automated electronic FLASH creation on each image and automatic incremental shot numbering – getting ready to shoot is fast and easy.

#### **Shot Time Improvement**

Shoot faster, radiate less and keep your source longer. In certain circumstances, it's even possible to reduce exposure time.

#### Image, Analyze & Approve in Seconds

Batch Mode was added to our INDUSTREX Software so the HPX-PRO can keep moving down the line fast. The HPX-PRO scans and erases in one pass, eliminating wait-time for the plate to come back out during erase.

The HPX-PRO is designed to process a weld a minute, based on 5 ¾ in (15 cm) imaging plate length. Including scanning, erasing and image display on the monitor with a pre-set EDGE filter already applied. Skilled technicians can even approve a shot during scan preview.

### **Powerful INDUSTREX Digital Viewing Software**

The HPX-PRO runs on INDUSTREX Digital Viewing Software, an all-in-one software enabling customers to standardize on one software platform both CR and DR inspection.

The software platform was developed for ease-of-use to reduce operator training and equipment onboarding time, thus reducing risk of error and increasing profitability. Further operating cost reductions are realized with the suite of image process automation tools to streamline the inspection process and increase production rates.

The combination of high-resolution defect detection, a heavy-duty design, reliable service and powerful image processing software gives unsurpassed value to every customer.





### Flex HR-PRO High-Resolution Digital Imaging Plates

This specialized line of laminated high-resolution (HR) imaging plates are designed for outdoor industrial field radiography, to provide a longer usable life and improved overall ROI for HPX-PRO users. This plate can be used in either gamma or X-ray radiography applications and has the same image quality as our HR plate. Available in a full range of sizes specifically for the HPX-PRO.



## **CarestreamNDT**

#### **SPECIFICATIONS**

Air Flow Filtered, positive air flow in scanner for temperature control  Scanning Optics Located above imaging area eliminating gravity driven particulates  Erase LED erase lamps for high efficiency and low power consumption  Maintenance User serviceable wear parts  Calibration Fully factory calibrated and ready to operate  Pixel Pitch 25 μm, 50 μm and 100 μm  Plate Sizes Maximum 6 in (15 cm) width x maximum 60 in (152 cm) length  Software INDUSTREX (Turnkey ready, Windows 10 64 bit)  Filter Carestream's EDGE image filter offers users a choice of display filters modifying the original image data. Image can be sharpened or enhanced with grayscale equalization.  Monitor Laptop, 3MP (color) or 5MP (monochrome)  Chassis Rigid aluminum construction with vibration damping feet  Power 100-240 VAC (Automatic Level Sensing)  Battery 24 volt standard tool battery  Battery Life 4 hours standby / 45 minutes active scanning and erasing per battery  Warranty 1 year parts and labor  Installation Ships complete and can be quickly and easily installed on-site by customer  Dimensions 16 in (40.6 cm) x 13 in (33 cm) x 12 in (30.5 cm)	Feed Mechanism	Internal horizontal roller pairs
Air Flow Filtered, positive air flow in scanner for temperature control  Scanning Optics Located above imaging area eliminating gravity driven particulates  Erase LED erase lamps for high efficiency and low power consumption  Maintenance User serviceable wear parts  Calibration Fully factory calibrated and ready to operate  Pixel Pitch 25 μm, 50 μm and 100 μm  Plate Sizes Maximum 6 in (15 cm) width x maximum 60 in (152 cm) length  Software INDUSTREX (Turnkey ready, Windows 10 64 bit)  Filter Carestream's EDGE image filter offers users a choice of display filters modifying the original image data. Image can be sharpened or enhanced with grayscale equalization.  Monitor Laptop, 3MP (color) or 5MP (monochrome)  Chassis Rigid aluminum construction with vibration damping feet  Power 100-240 VAC (Automatic Level Sensing)  Battery 24 volt standard tool battery  Battery Life 4 hours standby / 45 minutes active scanning and erasing per battery  Warranty 1 year parts and labor  Installation Ships complete and can be quickly and easily installed on-site by customer  Dimensions 16 in (40.6 cm) x 13 in (33 cm) x 12 in (30.5 cm)	Connectivity	Ethernet connection standard (1 Gb/s)
Scanning Optics  Located above imaging area eliminating gravity driven particulates  Erase  LED erase lamps for high efficiency and low power consumption  Maintenance  User serviceable wear parts  Calibration  Fully factory calibrated and ready to operate  Pixel Pitch  25 µm, 50 µm and 100 µm  Plate Sizes  Maximum 6 in (15 cm) width x maximum 60 in (152 cm) length  Software  INDUSTREX (Turnkey ready, Windows 10 64 bit)  Filter  Carestream's EDGE image filter offers users a choice of display filters modifying the original image data. Image can be sharpened or enhanced with grayscale equalization.  Monitor  Laptop, 3MP (color) or 5MP (monochrome)  Chassis  Rigid aluminum construction with vibration damping feet  Power  100-240 VAC (Automatic Level Sensing)  Battery  24 volt standard tool battery  Battery Life  4 hours standby / 45 minutes active scanning and erasing per battery  Warranty  1 year parts and labor  Installation  Ships complete and can be quickly and easily installed on-site by customer  Dimensions  16 in (40.6 cm) x 13 in (33 cm) x 12 in (30.5 cm)	Network	DICONDE compliant
Erase LED erase lamps for high efficiency and low power consumption  Maintenance User serviceable wear parts  Calibration Fully factory calibrated and ready to operate  Pixel Pitch 25 µm, 50 µm and 100 µm  Plate Sizes Maximum 6 in (15 cm) width x maximum 60 in (152 cm) length  Software INDUSTREX (Turnkey ready, Windows 10 64 bit)  Filter Carestream's EDGE image filter offers users a choice of display filters modifying the original image data. Image can be sharpened or enhanced with grayscale equalization.  Monitor Laptop, 3MP (color) or 5MP (monochrome)  Chassis Rigid aluminum construction with vibration damping feet  Power 100-240 VAC (Automatic Level Sensing)  Battery 24 volt standard tool battery  Battery Life 4 hours standby / 45 minutes active scanning and erasing per battery  Warranty 1 year parts and labor  Installation Ships complete and can be quickly and easily installed on-site by customer  Dimensions 16 in (40.6 cm) x 13 in (33 cm) x 12 in (30.5 cm)	Air Flow	Filtered, positive air flow in scanner for temperature control
MaintenanceUser serviceable wear partsCalibrationFully factory calibrated and ready to operatePixel Pitch25 μm, 50 μm and 100 μmPlate SizesMaximum 6 in (15 cm) width x maximum 60 in (152 cm) lengthSoftwareINDUSTREX (Turnkey ready, Windows 10 64 bit)FilterCarestream's EDGE image filter offers users a choice of display filters modifying the original image data. Image can be sharpened or enhanced with grayscale equalization.MonitorLaptop, 3MP (color) or 5MP (monochrome)ChassisRigid aluminum construction with vibration damping feetPower100-240 VAC (Automatic Level Sensing)Battery24 volt standard tool batteryBattery Life4 hours standby / 45 minutes active scanning and erasing per batteryWarranty1 year parts and laborInstallationShips complete and can be quickly and easily installed on-site by customerDimensions16 in (40.6 cm) x 13 in (33 cm) x 12 in (30.5 cm)	Scanning Optics	Located above imaging area eliminating gravity driven particulates
CalibrationFully factory calibrated and ready to operatePixel Pitch25 μm, 50 μm and 100 μmPlate SizesMaximum 6 in (15 cm) width x maximum 60 in (152 cm) lengthSoftwareINDUSTREX (Turnkey ready, Windows 10 64 bit)FilterCarestream's EDGE image filter offers users a choice of display filters modifying the original image data. Image can be sharpened or enhanced with grayscale equalization.MonitorLaptop, 3MP (color) or 5MP (monochrome)ChassisRigid aluminum construction with vibration damping feetPower100-240 VAC (Automatic Level Sensing)Battery24 volt standard tool batteryBattery Life4 hours standby / 45 minutes active scanning and erasing per batteryWarranty1 year parts and laborInstallationShips complete and can be quickly and easily installed on-site by customerDimensions16 in (40.6 cm) x 13 in (33 cm) x 12 in (30.5 cm)	Erase	LED erase lamps for high efficiency and low power consumption
Pixel Pitch25 μm, 50 μm and 100 μmPlate SizesMaximum 6 in (15 cm) width x maximum 60 in (152 cm) lengthSoftwareINDUSTREX (Turnkey ready, Windows 10 64 bit)FilterCarestream's EDGE image filter offers users a choice of display filters modifying the original image data. Image can be sharpened or enhanced with grayscale equalization.MonitorLaptop, 3MP (color) or 5MP (monochrome)ChassisRigid aluminum construction with vibration damping feetPower100-240 VAC (Automatic Level Sensing)Battery24 volt standard tool batteryBattery Life4 hours standby / 45 minutes active scanning and erasing per batteryWarranty1 year parts and laborInstallationShips complete and can be quickly and easily installed on-site by customerDimensions16 in (40.6 cm) x 13 in (33 cm) x 12 in (30.5 cm)	Maintenance	User serviceable wear parts
Plate Sizes Maximum 6 in (15 cm) width x maximum 60 in (152 cm) length  Software INDUSTREX (Turnkey ready, Windows 10 64 bit)  Filter Carestream's EDGE image filter offers users a choice of display filters modifying the original image data. Image can be sharpened or enhanced with grayscale equalization.  Monitor Laptop, 3MP (color) or 5MP (monochrome)  Chassis Rigid aluminum construction with vibration damping feet  Power 100-240 VAC (Automatic Level Sensing)  Battery 24 volt standard tool battery  Battery Life 4 hours standby / 45 minutes active scanning and erasing per battery  Warranty 1 year parts and labor  Installation Ships complete and can be quickly and easily installed on-site by customer  Dimensions 16 in (40.6 cm) x 13 in (33 cm) x 12 in (30.5 cm)	Calibration	Fully factory calibrated and ready to operate
Software INDUSTREX (Turnkey ready, Windows 10 64 bit)  Filter Carestream's EDGE image filter offers users a choice of display filters modifying the original image data. Image can be sharpened or enhanced with grayscale equalization.  Monitor Laptop, 3MP (color) or 5MP (monochrome)  Chassis Rigid aluminum construction with vibration damping feet  Power 100-240 VAC (Automatic Level Sensing)  Battery 24 volt standard tool battery  Battery Life 4 hours standby / 45 minutes active scanning and erasing per battery  Warranty 1 year parts and labor  Installation Ships complete and can be quickly and easily installed on-site by customer  Dimensions 16 in (40.6 cm) x 13 in (33 cm) x 12 in (30.5 cm)	Pixel Pitch	25 μm, 50 μm and 100 μm
Filter Carestream's EDGE image filter offers users a choice of display filters modifying the original image data. Image can be sharpened or enhanced with grayscale equalization.  Monitor Laptop, 3MP (color) or 5MP (monochrome)  Chassis Rigid aluminum construction with vibration damping feet  Power 100-240 VAC (Automatic Level Sensing)  Battery 24 volt standard tool battery  Battery Life 4 hours standby / 45 minutes active scanning and erasing per battery  Warranty 1 year parts and labor  Installation Ships complete and can be quickly and easily installed on-site by customer  Dimensions 16 in (40.6 cm) x 13 in (33 cm) x 12 in (30.5 cm)	Plate Sizes	Maximum 6 in (15 cm) width x maximum 60 in (152 cm) length
original image data. Image can be sharpened or enhanced with grayscale equalization.  Monitor Laptop, 3MP (color) or 5MP (monochrome)  Rigid aluminum construction with vibration damping feet  Power 100-240 VAC (Automatic Level Sensing)  Battery 24 volt standard tool battery  Battery Life 4 hours standby / 45 minutes active scanning and erasing per battery  Warranty 1 year parts and labor  Installation Ships complete and can be quickly and easily installed on-site by customer  Dimensions 16 in (40.6 cm) x 13 in (33 cm) x 12 in (30.5 cm)	Software	INDUSTREX (Turnkey ready, Windows 10 64 bit)
Chassis Rigid aluminum construction with vibration damping feet  Power 100-240 VAC (Automatic Level Sensing)  Battery 24 volt standard tool battery  Battery Life 4 hours standby / 45 minutes active scanning and erasing per battery  Warranty 1 year parts and labor  Installation Ships complete and can be quickly and easily installed on-site by customer  Dimensions 16 in (40.6 cm) x 13 in (33 cm) x 12 in (30.5 cm)	Filter	
Power 100-240 VAC (Automatic Level Sensing)  Battery 24 volt standard tool battery  Battery Life 4 hours standby / 45 minutes active scanning and erasing per battery  Warranty 1 year parts and labor  Installation Ships complete and can be quickly and easily installed on-site by customer  Dimensions 16 in (40.6 cm) x 13 in (33 cm) x 12 in (30.5 cm)	Monitor	Laptop, 3MP (color) or 5MP (monochrome)
Battery 24 volt standard tool battery  Battery Life 4 hours standby / 45 minutes active scanning and erasing per battery  Warranty 1 year parts and labor  Installation Ships complete and can be quickly and easily installed on-site by customer  Dimensions 16 in (40.6 cm) x 13 in (33 cm) x 12 in (30.5 cm)	Chassis	Rigid aluminum construction with vibration damping feet
Battery Life 4 hours standby / 45 minutes active scanning and erasing per battery  1 year parts and labor  Installation Ships complete and can be quickly and easily installed on-site by customer  Dimensions 16 in (40.6 cm) x 13 in (33 cm) x 12 in (30.5 cm)	Power	100-240 VAC (Automatic Level Sensing)
Warranty 1 year parts and labor Installation Ships complete and can be quickly and easily installed on-site by customer Dimensions 16 in (40.6 cm) x 13 in (33 cm) x 12 in (30.5 cm)	Battery	24 volt standard tool battery
Installation Ships complete and can be quickly and easily installed on-site by customer  Dimensions 16 in (40.6 cm) x 13 in (33 cm) x 12 in (30.5 cm)	Battery Life	4 hours standby / 45 minutes active scanning and erasing per battery
Dimensions 16 in (40.6 cm) x 13 in (33 cm) x 12 in (30.5 cm)	Warranty	1 year parts and labor
	Installation	Ships complete and can be quickly and easily installed on-site by customer
Weight 35 lb (16 kg)	Dimensions	16 in (40.6 cm) x 13 in (33 cm) x 12 in (30.5 cm)
	Weight	35 lb (16 kg)





The HPX-PRO Digital System has been certified with our HR-PRO and XL Blue imaging plates, certificates BAM/ZBF/005/20 and BAM/ZBF/009/15 respectively. Our system meets requirements according to EN 14784-1:2005, ISO 16371-1:2011 and ASTM E2446-16.

Carestream manufactures these products in a certified Quality Management System which complies with the requirements of ISO 9001:2015



7952 Nieman Road, Lenexa, KS 66214-1560 USA Phone: 913-685-0675, Fax: 913-685-1125 <a href="https://www.ndtsupply.com">www.ndtsupply.com</a>, sales@ndtsupply.com

CARESTREAM NDT AND YOU.
WE'RE BETTER TOGETHER.



