




BEYOND ULTRASONICS

Dual Replaceable Delay

Dual Replaceable Delay Line Transducers are ideally suited for larger area scanning of flaws, thickness, pitting, porosity, and/or in high wear applications where replacement delays can extend the life of the transducer. Optional High Temperature Delays allow for intermittent use up to 400 degrees F

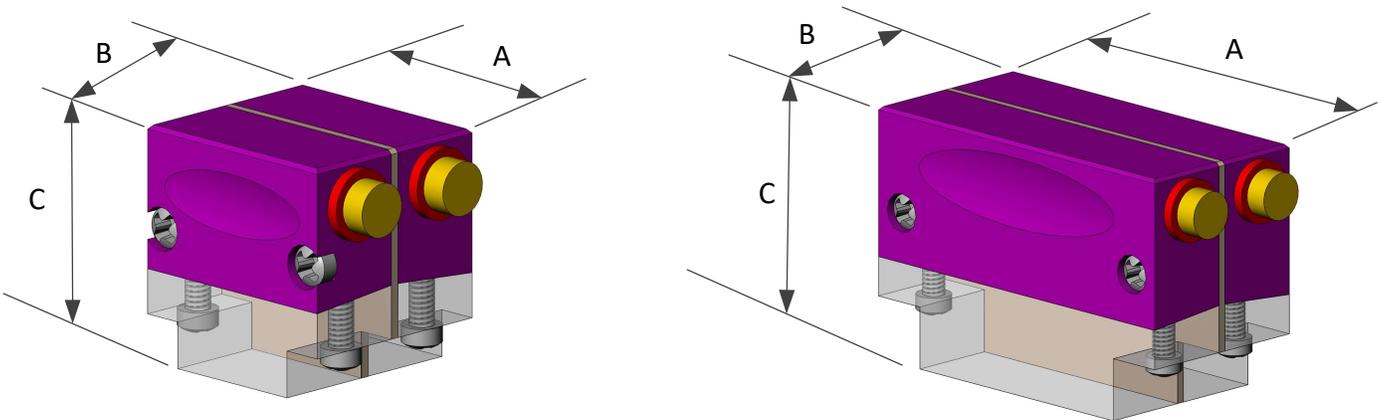

Frequency	Element Size	General Purpose	High Resolution	High Gain
1	0.50"x0.50"	DGR0100808	DRR0100808	DPR0100808
	0.50"x1.0"	DGR0100816	DRR0100816	DPR0100816
2.25	0.50"x0.50"	DGR0200808	DRR0200808	DPR0200808
	0.50"x1.0"	DGR0200816	DRR0200816	DPR0200816
3.5	0.50"x0.50"	DGR0300808	DRR0300808	DPR0300808
	0.50"x1.0"	DGR0300816	DRR0300816	DPR0300816
5	0.50"x0.50"	DGR0500808	DRR0500808	DPR0500808
	0.50"x1.0"	DGR0500816	DRR0500816	DPR0500816

* Top Mount Connectors are optionally available.

Replacement Delays

Standard Delays

Element Size	
0.50" x .50"	DR0808
0.50" x 1.00"	DR0816

Supplied as a kit with 2 delays and 1 barrier.

High Temp. Delays

Replacement Delays

Element Size	
0.50" x .50"	DR0808HT
0.50" x 1.00"	DR0816HT

Housing Dimensions

Element Size	A	B	C
0.50" x .50"	0.80"	0.73"	0.82"
0.50" x 1.00"	1.50"	0.73"	1.00"

Dimensions in inches