## **Dakota NDT**


**Engine Builders / Racing** 

Sonic Testers, Transducers & Accessories - Price List

Date: 05/01/24

Models	Features	Part #	Price US
R9 Formerly: PR-9	Field Calibration of all materials (one or two point option), High Speed Scanning, and Backlit Display.	Z-309-0002	1375.00
RX8-DL	All the features of the R9 with a Time Based B-Scan to graphically draw the contour of the blind surface in a cylinder according to thickness. High speed scan (250 readings per second). Measures through paint and eliminates the thickness of the paint which causes errors on roll cages and chassis tubing. USB-C connectivity w/4GB internal SD memory. Selectable data structure option for engines, or general tubing inspection. Adjustable gain for noisy material or additional output. Probe type list for improved linearity. DakView cylinder wall mapping software (engine or grid file formats).	Z-158-0004	2100.00
Kit Includes:	Unit, Standard Transducer, Couplant, Manual, Plastic	Carrying Case	and AA
	Batteries. PC Engine Mapping Software and Transfer DL / PR-8V gauge. Software available for download or	Cable included	

## **Dual Transducer Reference Chart**

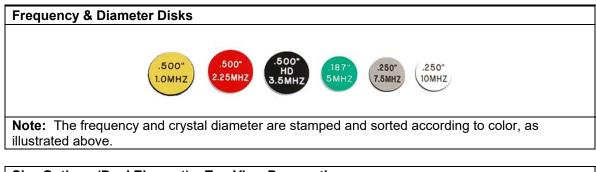

Size Options (Dual Element) – Top View Perspective			
3/16" Version	1⁄4" Version	½" Version	
Note: Customs sizes are availa	ble upon request	•	

**Note:** Customs sizes are available upon request.

NDT Supply.com, Inc. 7952 Nieman Road Lenexa, KS 66214-1560 USA

Phone: 913-685-0675, Fax: 913-685-1125 e-mail: sales@ndtsupply.com, www.ndtsupply.com



Styles (Dual Element) - Dime	nsional Perspective	
THU A	1 martine	A REAL PROPERTY AND A REAL
3/16" Std Version – Chasis Tubing / Sanctioning	3/16" Low ProfileVersion	1⁄4" Std Version
1⁄4" Low Profile – Head Ports 1" Wand	¼" Low Profile – Head Ports 9" Wand	1/2" Cylinder Walls - Blocks
Note: Customs sizes are availa	able upon request.	

5.0 MHz Dual Element Transducers (Cast Iron)
Materials Used: Cast Iron, Steel, Glass, Thin Plastics
Applications Used: Cylinders, Heads, Decks, Tubing, Body panels, Wind shields
$\sqrt{Most Common}$ : Covers majority of all iron automotive applications.

Diameter	Part #	Comments	$\checkmark$	Connector	Radius	Entry	Price \$
3/16"	T-121-2100	Low Profile		Potted	0"	Side	320.00
1/4"	T-102-2000	Chassis tubing- Standard	V	Potted	0"	Side	320.00
1/4"	T-102-2700	Thru-paint Chassis tubing – PR-8V (E-E)	٧	Potted	0"	Side	360.00
1/4"	T-162-2110	Low Profile 1" wand for cast iron head ports	V	Potted	.6"	Side	330.00
1/4"	T-132-2110	Low Profile 9" wand for cast iron head ports		Potted	.6"	Side	330.00
1/2"	T-104-2120	Cylinder Probe - Iron	$\checkmark$	Potted	2"	Side	330.00

**Note:** The ranges below are general ranges only, as the cast consistency varies from batch to batch. The more consistent the cast material is, the easier it is to pass sound through. If the material range is not specified below, this indicates that the probe frequency is not a good match for the material.

Diameter	Mode	Range (ST=Steel) (CI = Cast Iron) (CA= Cast Aluminum)	Wearface Diameter	Crystal Diameter
3/16"	P-E	.060" to 2.0" ST	1/4"	3/16"
3/16"	P-E	.060" to .500" CI	1/4"	3/16"
1/4"	P-E	.040" to 6.0" ST	3/8"	1/4"
1/4"	P-E	.040" to .650" CI	3/8"	1/4"
1/4"	E-E PR-8V	.050" to 1.0" ST	3/8"	1/4"
1/2"	P-E	.050" to 15.0" ST	5/8"	1/2"
1/2"	P-E	.050" to 1.5" CI	3/8"	1/4"

**Note:** Additional High Damped versions are available in the above configurations for an additional charge. These items are custom builds only.

10.0 MHz Dual Element Transducers (Cast Aluminum)

Materials Used: Cast Iron, Steel, Glass, Thin Plastics

**Applications Used:** Cylinders , Heads, Decks, Tubing, Body panels, Wind shields  $\sqrt{Most Common}$ : Covers majority of all aluminum automotive applications.

Diameter	Part #	Comments	$\checkmark$	Connector	Radius	Entry	Price \$
3/16"	T-101-4000	NHRA chassis tubing	$\checkmark$	Potted	0"	Side	350.00
1/4"	T-162-4110	Low Profile 1" wand for cast alum. head ports	√	Potted	.6"	Side	350.00
1/4"	T-132-4110	Low Profile 9" wand for cast alum. head ports		Potted	.6"	Side	350.00
1/2"	T-104-4120	Cylinder Probe – Alum.		Potted	2"	Side	355.00

**Note:** The ranges below are general ranges only, as the cast consistency varies from batch to batch. The more consistent the cast material is, the easier it is to pass sound through. If the material range is not specified below, this indicates that the probe frequency is not a good match for the material.

Diameter	Mode	Range (ST=Steel) (CI = Cast Iron) (CA= Cast Aluminum)	Wearface Diameter	Crystal Diameter
3/16"	P-E	.040" to 2.0" ST	1/4"	3/16"
3/16"	P-E	.060" to .500" CA	1/4"	3/16"
1/4"	P-E	.040" to 6.0" ST	3/8"	1/4"
1/4"	P-E	.040" to 1.0" CA	3/8"	1/4"
1/2"	P-E	.050" to 10.0" ST	5/8"	1/2"
1/2"	P-E	.050" to 1.5" CA	3/8"	1/4"

**Note:** Additional High Damped versions are available in the above configurations for an additional charge. These items are custom builds only.

## Accessory Items

Instrument & Carrying Cases						
Part #	Description	Comments	Price \$			
F-100-0004	PR-8 Instrument Case	Nylon	60.00			
F-112-0005	PR-8 <sup>2</sup> Series Nylon Case	Nylon	60.00			
F-302-0001	R9 / PR-9 Instrument Case	Nylon	60.00			
A-302-6002	R9 / PR-9 Instrument Case	Rubber	95.00			
F-149-0001	RX8-DL/ PR-8V Instrument Case	Nylon	90.00			
A-149-6002	RX8-DL / PR-8V v2.0 Instrument Case	Rubber	115.00			
A-100-6002	Plastic Carrying Brief Case	PR-8 <sup>2</sup>	40.00			
A-302-6003	Plastic Carrying Brief Case	R9 / PR-9	45.00			
A-100-6003	Plastic Carrying Brief Case	RX8-DL / PR-8V	45.00			

Couplant			
Part #	Description	Comments	Price \$
V-000-0001	4 oz bottle		20.00
V-000-0003	12 oz bottle		30.00
V-000-0004	1 gallon		180.00

Calibration Blocks			
Part #	Description	Mat'l Type	Price \$
X-000-0001	5 Step100" to .500"	4340 Steel	235.00
X-000-0002	4 Step250 to 1.0"	4340 Steel	235.00

<i>l</i> isc. Accessories		•	
Part #	Description	Comments	Price \$
F-000-7001	Bell Shaped Spring Loaded Probe	Std Can Style	170.00
	Holder (V-Block)	Probes Only	

Data Cables			
Part #	Description	Comments	Price \$
N-306-0010	6 foot RS232 (DB-9 to Lemo)	PR-8V v1.0	80.00
N-402-0510	USB to Serial Adapter	PR-8V v1.0	45.00

Software & Data CD			
Part #	Description	Comments	Price \$
	DakView Software & Manual (.pdf) (note: software & manual available for download on our website at no charge)	R9 / PR-9 & RX8- DL / PR-8V	N/C

## NDT Supply.com, Inc. 7952 Nieman Road Lenexa, KS 66214-1560 USA

Phone: 913-685-0675, Fax: 913-685-1125 e-mail: sales@ndtsupply.com, www.ndtsupply.com

