

RH-150AUTO • RH-45AUTO (Superficial) **MODULAR ROCKWELL HARDNESS TESTER**



High Precision

Repeatable

Automatic

**Fast and Easy
Operation**

Wide Application

**Lightweight:
Less than 20 Kg**

**Small: 500mm X
280mm X 200mm**

**250mm Vertical
Clearance**

130mm Depth



G & R TECHNOLOGY INC.

MAIN UNIT

RH-150AUTO and **RH-45AUTO** [Superficial] Modular Rockwell Hardness Testers are accurate advanced instruments built with precise force sensors and depth measurement systems for high repeatability and reliability. These automatic test machines are easy to use. Just push a button to get a precise test result in 10 seconds!




SPECIFICATIONS

| | RH-150AUTO | RH-45AUTO |
|------------------------|---|-------------------------------------|
| Preliminary Load Kg(N) | 10 (98.07) | 3 (29.42) |
| Total Test Force Kg(N) | 60, 100, 150 (588.4, 980.7, 1471) | 15, 30, 45 (147.1, 294.2, 441.3) |
| Test Scale | A, B, C | 15N, 30N, 45N 15T, 30T, 45T |
| Test Load Control | Load Cell Based Feedback Loop System | |
| Test Cycle Type | Motorized (Auto Load, Test and Return) | |
| Standards Compliant | ASTM E18, ISO 6508, ASTM E140 | |
| Resolution | 0.1 HR | |
| Data Output | Bluetooth (to Printer), USB (to PC) | |
| Data Memory | 1000 Test Results | |
| Battery | Rechargeable Li-ion Battery Work Time 6 hours Charge Time 2 hours | |
| Weight | 2 Kg | |
| Dimensions | 200mm X 110mm X 46mm | |


These versatile testers are customizable with different frames to accommodate test specimens of many sizes and shapes.

ACCESSORIES

Retaining Frames

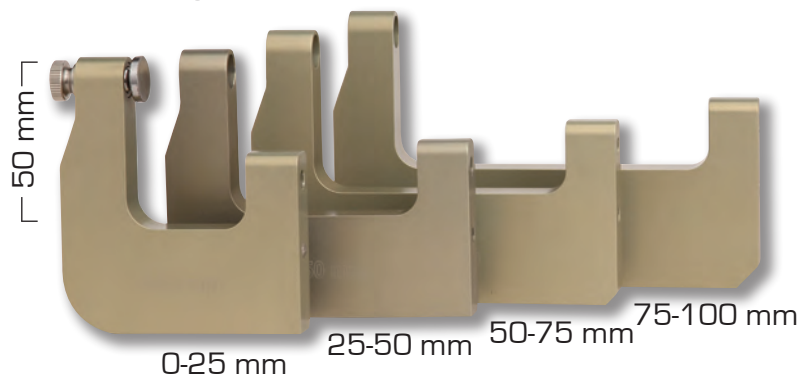

Column Frame:

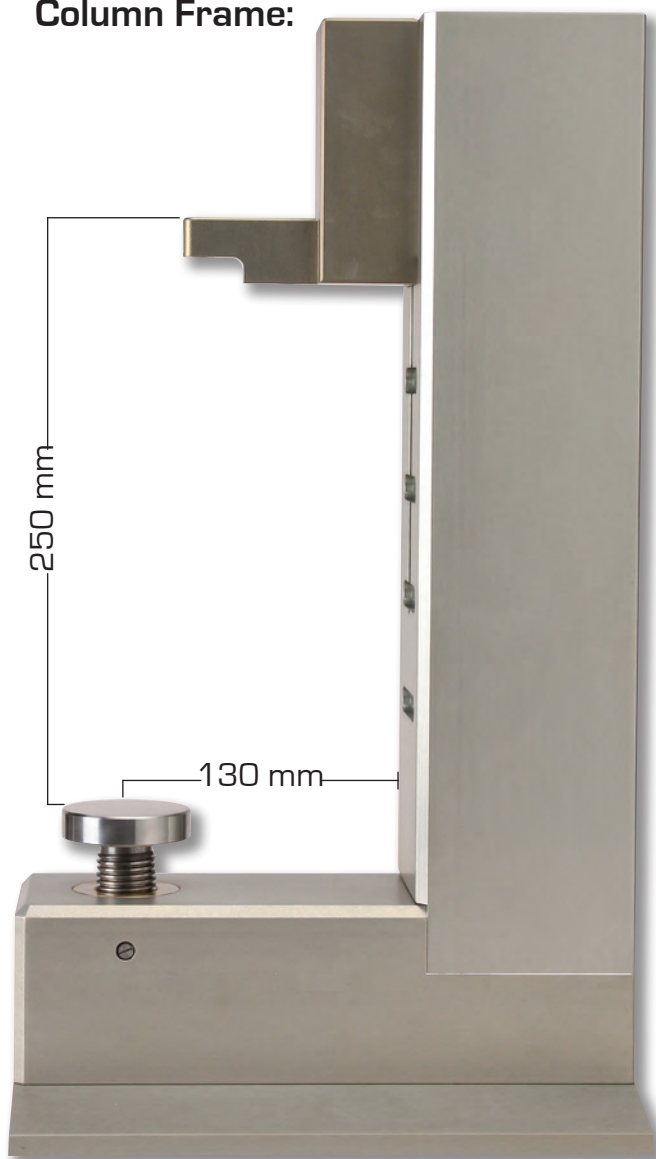

Tube Testing Frame



Tube Wall Thickness Up to 20 mm

Certified Tester Blocks and Indenters



Bluetooth Printer





G & R TECHNOLOGY INC.

2373 Teller Road, Unit 102

Newbury Park, CA 91320 USA

Tel: (805) 499-8015

Fax: (866) 565-2294

E-mail: sales@grhardnesstester.com

www.grhardnesstester.com



Assembled in USA

US Patent No. 7,066,013

EC Directives: (2004/108/EC)
(2006/95/EC)

NDT Supply.com, Inc.

7952 Nieman Road

Lenexa, KS 66214-1560 USA

Phone: 913-685-0675, Fax: 913-685-1125

e-mail: sales@ndtsupply.com, www.ndtsupply.com

