

▶ COMPACTNESS AT ITS BEST



CPBATTERY CP120B

Battery Operated Portable X-Ray Generator



NDT Supply.com, Inc.
7952 Nieman Road
Lenexa, KS 66214-1560 USA

Phone: 913-685-0675, Fax: 913-685-1125
e-mail: sales@ndtsupply.com, www.ndtsupply.com



TELEDYNE ICM
Everywhereyoulook™

Part of the Teledyne Imaging Group

All the power you need and more



LIGHT-WEIGHT



BATTERY OPERATED




SMALL FOCAL SPOT



DR-READY



UP TO 120 KV



ROTATING TANK

FEATURES

	Unit	CP120B
BEAM	-	Directional
POWER SUPPLY	-	Battery
Output voltage range	kV	40 to 120
Tube current range	mA	0.1 to 1.0
Tube current at full output	mA	1.0
Maximum power at the anode	W	120
Constant power mode	-	Yes
Working cycle at 30°C (*)	%	/
Steel penetration	mm/in	10 / 0.4 **
Weight (excluding hand rings)	Kg/lbs	7.0 / 15.4
Overall dimensions	mm/in	Ø 124 x 440 / 4.9 x 17.3
Leakage dose at 1 m at full output	mSv/h	< 2.0
Optical focal spot according to EN 12543	mm/in	0.8 x 0.5 / 0.03 x 0.02
Maximum useful angle	°	50 x 50
Inherent filtration	mm/in	Equiv. 3.5 / 0.1 (Al)
Waterproof level	-	IP54
Operating temperature	°C/°F	-25 to +50 / -13 to +140
Storage temperature	°C/°F	-40 to +80 / -40 to +176
Guard rings	-	Optional

(**) 400 mm FFD, 1min, AA400, D=2 for CPB

ACCESSORIES



RUGGEDIZED STRUCTURE



ADJUSTABLE COLLIMATOR



CARBON TRIPOD



FAST BATTERY CHARGER







TRIGGER



EXTERNAL POWER SUPPLY

DRAWINGS

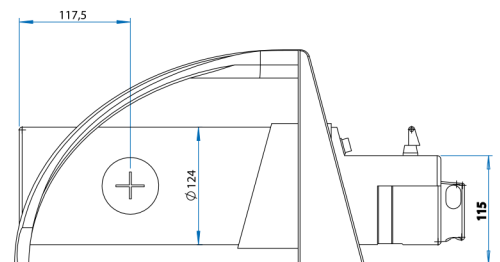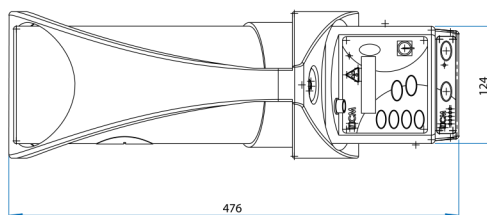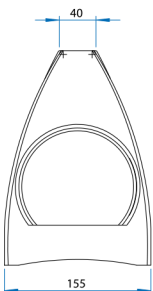

NDT Supply.com, Inc.

7952 Nieman Road
Lenexa, KS 66214-1560 USA

Phone: 913-685-0675, Fax: 913-685-1125

e-mail: sales@ndtsupply.com, www.ndtsupply.com



TELEDYNE ICM
Everywhere you look™

Part of the Teledyne Imaging Group

▶ COMPACTNESS AT ITS BEST



CPBATTERY CP160B

Battery Operated Portable X-Ray Generator



NDT Supply.com, Inc.
7952 Nieman Road
Lenexa, KS 66214-1560 USA

Phone: 913-685-0675, Fax: 913-685-1125
e-mail: sales@ndtsupply.com, www.ndtsupply.com



TELEDYNE ICM
Everywhereyoulook™

Part of the Teledyne Imaging Group

All the power you need and more



LIGHT-WEIGHT



BATTERY OPERATED




SMALL FOCAL SPOT



DR-READY



UP TO 160 KV



ROTATING TANK

FEATURES

	Unit	CP160B
BEAM	-	Directional
POWER SUPPLY	-	Battery
Output voltage range	kV	40 to 160
Tube current range	mA	0.1 to 0.5
Tube current at full output	mA	0.5
Maximum power at the anode	W	80
Constant power mode	-	Yes
Working cycle at 30°C (*)	%	/
Steel penetration	mm/in	21 / 0.8 **
Weight (excluding hand rings)	Kg/lbs	9.2 / 20.3
Overall dimensions	mm/in	Ø 124 x 490 / 4.9 x 19.3
Leakage dose at 1 m at full output	mSv/h	< 2.0
Optical focal spot according to EN 12543	mm/in	0.8 x 0.7 / 0.03 x 0.03
Maximum useful angle	°	60 x 60
Inherent filtration	mm/in	Equiv. 3.5 / 0.1 (Al)
Waterproof level	-	IP54
Operating temperature	°C/°F	-25 to +50 / -13 to +140
Storage temperature	°C/°F	-40 to +80 / -40 to +176
Guard rings	-	/

(**) 400 mm FFD, 1min, AA400, D=2 for CPB

ACCESSORIES



RUGGEDIZED STRUCTURE



ADJUSTABLE COLLIMATOR



CARBON TRIPOD



FAST BATTERY CHARGER




TRIGGER



EXTERNAL POWER SUPPLY

DRAWINGS

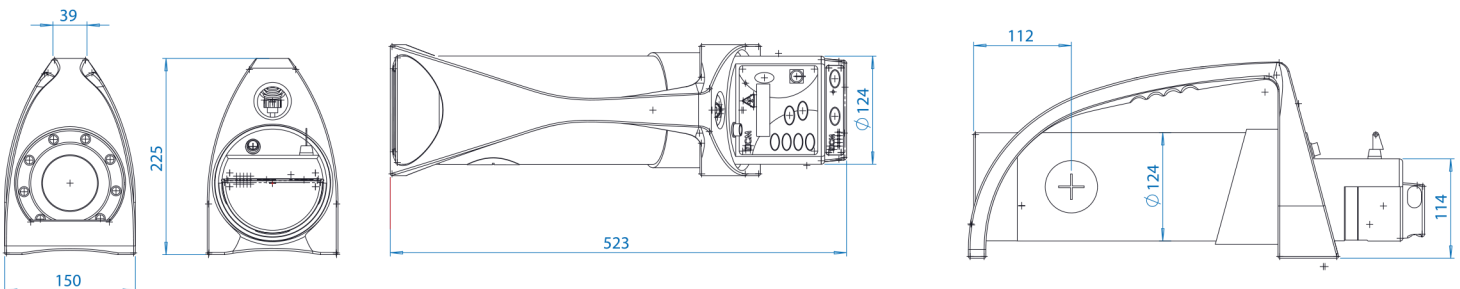

NDT Supply.com, Inc.
7952 Nieman Road
Lenexa, KS 66214-1560 USA

Phone: 913-685-0675, Fax: 913-685-1125
e-mail: sales@ndtsupply.com, www.ndtsupply.com



TELEDYNE ICM
Everywhere you look™

Part of the Teledyne Imaging Group