

IS-199 CHEMICAL MIXER



FEATURES

Specific Gravity Mixing System

The Ultimate in Convenience and Accuracy

Rugged Field Tested Components

Assure Reliability

Low Level Warning Systems

Audible and Visible

Easy-to-Service Design

UL/CSA Listed Power Supply

External Wall Mount Class 2 Transformer


24 Volt Operation

Low Voltage from Transformer for Safety

One Year Warranty on all Parts



EXPLODED VIEW OF MIXER

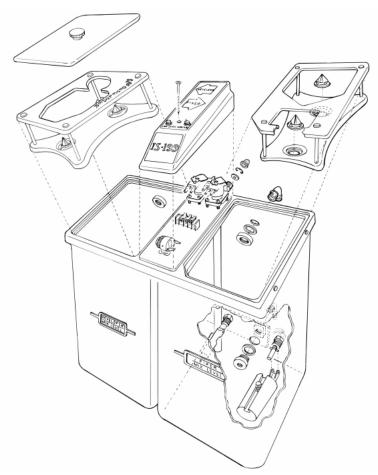

The Versatile Chemical Mixer Mixes the Following Chemicals:


- Medical X-Ray
- Graphic Arts
- Industrial X-Ray
- Microfilm

The **IS-199** incorporates a unique combination of features which make it the "Mixer of Choice" for both the user and the serviceperson.

The Specific Gravity Mixing System allows the user to start a mix at anytime. The mixer responds to the addition of concentrated chemicals and adds the correct amount of water automatically. All Electronic Components have been chosen for dependability. Straight-forward circuit designs eliminate the need for circuit boards thereby increasing reliability.

The Low Level Warning System indicates that solution level is 2.0 gallons or less. The warning system resets automatically when the user begins a 5 or 10 gallon mix.

INSTALLATION SITE SPECIFICATIONS

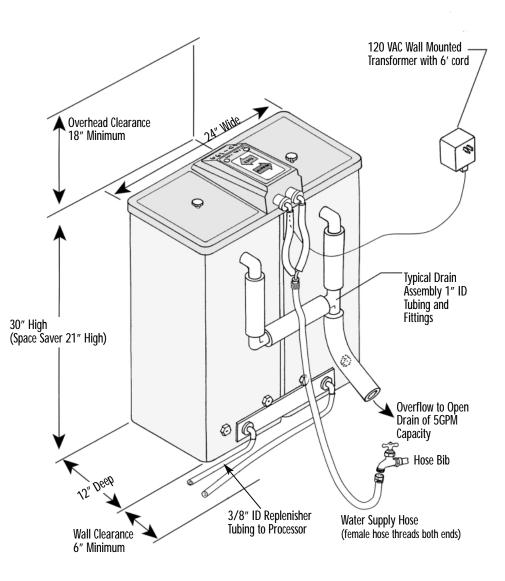

Installer to supply: 3/8" Replenisher Tubing

1" ID Drain Tubing & Fittings

High Pressure Water Supply Hose (FGHT Fittings)

TECHNICAL SPECIFICATIONS

Electrical:

120 VAC, 1/2A, 50/60Hz (240 VAC 1/4 A, 50/60Hz is optional)

Water

18-125 psi, 3GPM or more

Dimensions, Standard Model

30" H x 24"W x 12"D **Dimensions, Space Save** 21" H x 24"W x 12"D

Capacity, Standard Model

12.5 Gallons, Dev. & Fixer

Capacity, Space Save 7.5 Gallons, Dev. & Fixer


OTHER INFORMATION

All mixers made to order, allow up to 2 weeks for delivery. Mixers also available in 240 volt internal transformers. Rebuilt mixers available upon request. For more information contact White Mountain Imaging.




ACCESSORIES

Templates for other bottle configurations are available by request on a custom order basis.

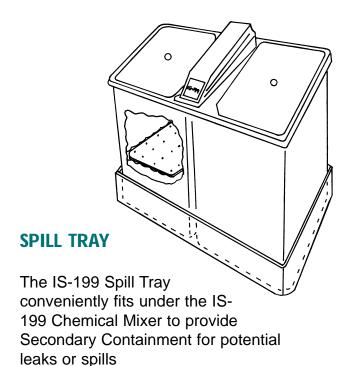

FLOATING LID

The IS-199 Floating Lid is designed to extend developer life by reducing aerial oxidation. The IS-199



Floating Lid is especially useful in low volume situations where premature oxidation may occur

MIXER TEMPLATES

T2 Developer/T2 Fixer WMI Cine Developer/Fixer Kodak Developers/Fixers Repackaged Developers AGFA Developers/Fixers Cronex Developer/Fixer Autex Developer/Fixer Simon Developer/Fixer

