


KOWODENS TD / TDi

Transmission Densitometer according to ISO 5, ISO 14807, ASTM E1079

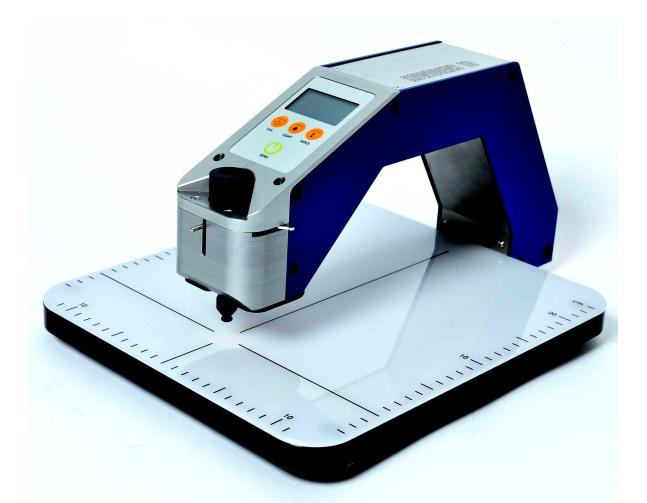

For precise determination of optical densities of X-ray films

IERS OF EQUIPMENT FOR INSPECTION



7952 Nieman Road, Lenexa, KS 66214-1560 USA Phone: 913-685-0675, Fax: 913-685-1125 www.ndtsupply.com, sales@ndtsupply.com

KOWODENS TD / TDi Transmission Densitometer, desktop model

For precise determination of optical densities of X-ray films the KOWODENS TD is equipped with innovative digital measuring technique. The KOWODENS TDi, in addition to the illuminated area around the measuring spot, has a completely illuminated table. The illuminated display enables easy readings even in darkened rooms and calibration of the instrument, done with the software, is simple and much more accurate than on conventional densitometers.

There are two ways of operating the measuring sensor – either by pressing it down onto the film or the sensor is laying on the film with slight pressure and is lifted before moving the film to next measuring spot.

Due to the soft tip sensor and rounded edges of the light table even large format films can be measured without scratching these.

Specification:

Gesellschaft für Prüfausrüstung mbH

Measuring range:	D 0.000 > D 5.5			AND I
Resolution:	≤ D 4.000 D 0.001	>D 4.00 D 0.01		
Accuracy:	+/- D 0.020	+/- D 0.03	000	
Repeatability:	+/- D 0.005	+/- D 0.01	0 20	
Measuring light source:			e e	
Color temperature: Luminance:	2,800 K ≤ D 4.0 - 40,000 c	d /m ²		
Luminance.	>D 4.0 - 40,000 cd			
Aperture size:	Ø 2.0 mm			2
Communication port:	USB 2.0, Micro USB		Strate Strates	
Power Supply:	100 240 V, 50 60 Hz			
Table illumination - LED:			3 7 7 70	
Color temperature:	4,000 K		Cha	
Luminance:	1,400 cd/m²			
Materials:	A.L		Se " pro	
Housing: Table:	Aluminum, anodiz Lucite (PMMA)	zed	of the strength	
Dimensions unit:	280 x 380 x 190 m		to the second se	
Dimensions table:	280 x 320 mm (W	2		
Length measuring arm:	260 mm	intraining ,		
Weight unit:	5.80 kg			
Weight power supply:	0.15 kg		and the second s	
Scope of supply:				
KOWODENS TDi Densitometer		Article No.: 13 40520		
with illuminated table		A		
KOWODENS TD Densiton	neter	Article No.: 13 40530	1	
complete with: Power supply unit (plug-in)		Article No.: 13 40532		
Anti-glare shield		Article No.: 13 40532	C	
Protective cover		Article No.: 13 40534	تو م	
Test report,, Certificate of	Conformity			
Accessories:			Montemportune for an international for an international for a first sector and the first sect	
Measuring ruler, set		Article No.: 13 40535		
>II< 1 cm, stainless steel				
BAM - X001 Density step tablet		Article No.: 13 40205	Attack of the second se	
15 density values, >0,20 >5,00				and
Re-calibration BAM - X00	1, 5 years validity	Article No.: 13 40206	The memory of a part of the state of the sta	
1			NDT Supply.com, Ir	nc.
	Intern		7952 Nieman Road Lenexa, KS 66214-1560 US	

Phone: 913-685-0675, Fax: 913-685-1125

e-mail: sales@ndtsupply.com, www.ndtsupply.com

SUPPLY.COM