


LCNDT PRO-400 SERIES Ultra-RUGGED LED UV LAMPS

5,000 $\mu\text{W}/\text{cm}^2$ – Wide 10" diameter beam at 15"
Fully code compliant
Waterproof & Drop-proof



Key Features

- Extremely wide beam profile: 10" diameter of UV-A intensity $>1000 \mu\text{W}/\text{cm}^2$ at 15"
- Waterproof and Drop Proof – IP 65 Rated
- UV intensity will not be affected by dropping or shocks
- No fan - But absolutely stays cool
- Includes Built-in Black Light Filter
- Universal AC Power – use anywhere 90-264V/47-63 Hz
- Certificate of Conformance and a serialized validation report included
- Complies with Rolls-Royce RRES 90061 Requirements and ASTM E3022 Standards

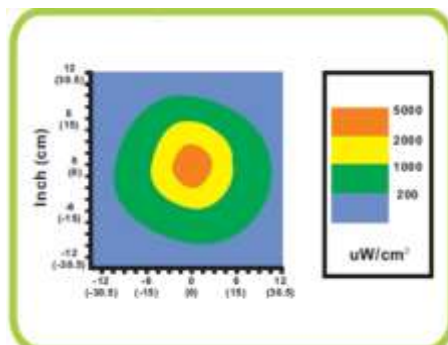

LCNDT PRO-400 SERIES Ultra-RUGGED LED UV LAMPS

5,000 $\mu\text{W}/\text{cm}^2$ – Wide 10" diameter beam at 15"
Fully code compliant
Waterproof & Drop-proof

MODEL	Maximum Intensity at 15"	Beam Diameter @ 15" > 1,000 $\mu\text{W}/\text{cm}^2$	Peak Wavelength	Light Source	Visible Light	White Light LED Intensity
PRO-400	5,000 $\mu\text{W}/\text{cm}^2$	10" Diameter	365 nm (+/- 5 nm)	1 UVA LED (4 core) and 1 Visible LED	< 0.5 ft-candles (5 lux)	163 ft-candles (1,800 lux)
PRO-400C	5,000 $\mu\text{W}/\text{cm}^2$	10" Diameter	365 nm (+/- 5 nm)	1 UV-A LED (4core)	< 0.5 ft-candles (5 lux)	N/A

Specifications:

- Dimensions: 3.3" Diameter, 4.7" wide x 7.9" high
- Weight: 1.9 lbs. (0.85 kg)
- Power: 90-264 VAC / 47-63 Hz
- Includes Built-in Black Light Filter
- Specification: ASTM E-3022, RRES 90061, ISO 3059
- Optional: External Li battery (2,600 mAh), Tripod Stand, IP67 Rugged Power Supply, 20' Power Cable

PRO-400 Standard Kit	Optional: IP67 Rugged Charger / Power Supply with 20 ft. Cable
	

NDT Supply.com

7952 Nieman Road
Lenexa, KS 66214-1560 USA



LCNDT PRO-400 SERIES Ultra-RUGGED LED UV LAMPS

5,000 $\mu\text{W}/\text{cm}^2$ – Wide 10” diameter beam at 15”
Fully code compliant
Waterproof & Drop-proof

PRO-400 Standard Kit Includes:

- Lamp
- 10' Power Cord
- Power Supply
- Goggles
- Carrying Case
- Serialized Certificates (ASTM & RRES)