




LCNDT PRO-400 Series Ultra-Rugged LED UV Lamps

Code Compliant, Ultra-Rugged LED UV Lamps



Features

- Extremely wide beam profile: 10" diameter of UV-A intensity > 1,000 $\mu\text{W}/\text{cm}^2$ at 15"
- Waterproof and Drop Proof - IP 65 Rated
- UV intensity will not be affected by dropping or shocks
- No fan - But absolutely stays cool
- Includes Built-in Black Light Filter
- Universal AC Power - use anywhere 90-264 V / 47-63 Hz
- Certificate of Conformance and a serialized validation report included
- Complies with Rolls-Royce RRES 90061 Requirements and ASTM E3022 Standards

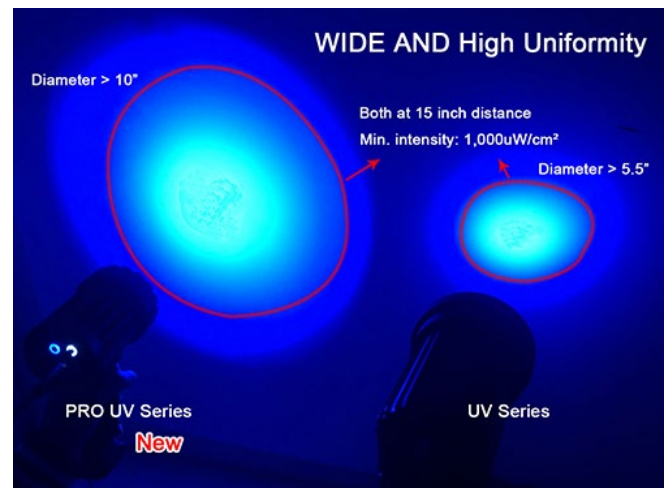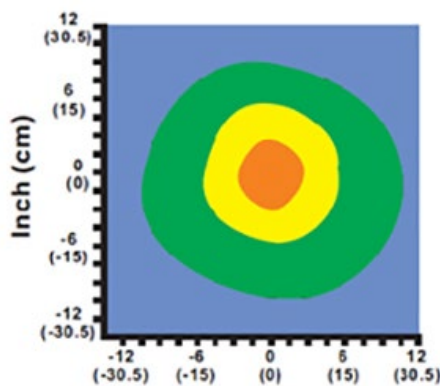

Technical Specifications

Model	Maximum Intensity @ 15"	Beam Diameter @ 15" > 1,000 $\mu\text{W}/\text{cm}^2$	Peak Wavelength	Light Source	Visible Light	White Light LED Intensity
PRO-400	5,000 $\mu\text{W}/\text{cm}^2$	10" Diameter	365 nm (+/- 5 nm)	1 UV-A LED (4 core) + 1 Visible Light	< 0.5 ft.-candles (5 lux)	163 ft.-candles (1,800 lux)
PRO-400C	5,000 $\mu\text{W}/\text{cm}^2$	10" Diameter	365 nm (+/- 5 nm)	1 UV-A LED (4 core)	< 0.5 ft.-candles (5 lux)	N/A

- Dimensions: 3.3" Diameter, 4.7" W x 7.9" H
- Weight: 1.9 lbs. (0.85 kg)
- Power: 90 - 264 VAC / 47 - 63 Hz
- Includes Built-in Black Light Filter
- ASTM E1417, ASTM E1444, ASTM E2297, ASTM E3022, RRES 90061 & ISO 3059 Compliant



Kit Includes

- Lamp
- 10' Power Cord
- Power Supply
- Goggles
- Carrying Case
- Serialized Certificates (ASTM & RRES)



Tripod Stand (left)



Magnetic Stand (right)

Additional Accessories

- Tripod Stand + Card T
- PRO-400 External Li Ion battery (2,600 mAh), 24VDC
- IP67 Rugged Power Supply
- 20' Power Cable
- Magnetic Stand with 360° Rotation
 - The first segment measures 8.85" (225mm), the second measures 6.29" (160mm)

The PRO-400 Includes a 5 Year Parts / 1 Year Labor Warranty