


DN-Integration

Power module designed for integration into switch cabinets for CT-U, SE, VE, RE and DS

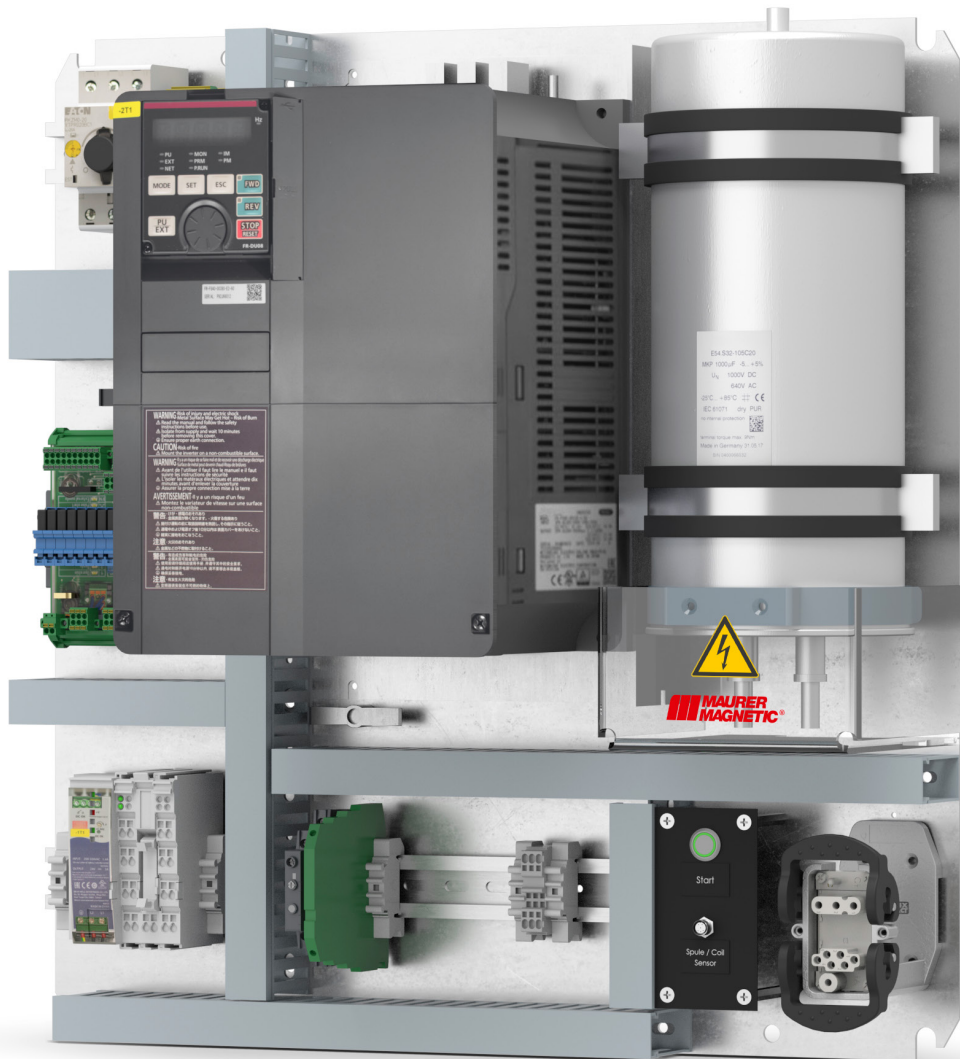

- > The DN integration allows an integrated operation of compatible coil modules with the patented Maurer Degaussing® pulse demagnetization
- > Can be installed directly into the existing switch cabinet on the customer's production machine
- > The power module entirely built onto the mounting plate eliminates the need for any additional cabinet on the machine
- > Fast and fault-free assembly and commissioning due to the ready-made mounting plate configured at the factory with plug connections on the output side
- > Efficient and easy connection with standard integrated field bus coupler
- > The module combines all advantages of the Maurer Degaussing® demagnetizing process with the SE/CT-U/VE/RE/DS coils

NDT Supply.com, Inc.

7952 Nieman Road
Lenexa, KS 66214-1560 USA

Phone: 913-685-0675, Fax: 913-685-1125

e-mail: sales@ndtsupply.com, www.ndtsupply.com



Swiss Made



«Ready-made»

Completely configured and ready-made setup on the mounting plate

The DN Integration power module offers space-saving integration into switch cabinets, allowing a simpler system layout for cleaning systems, for example, without requiring an additional switch cabinet for demagnetization. With the standard integrated field bus coupler and the pre-tested and ready-to-use controller on the mounting plate, easy and trouble-free integration is guaranteed. The system status is displayed completely and clearly visible on the interface board with the aid of LEDs, and is then transferred and signaled to the coil modules. Consistent use of industrial standard components ensures a long-term, trouble-free operation.

In 2001, Maurer Magnetic developed the Maurer Degaussing® demagnetizing process, for which a patent was applied for. With our many years of experience and the expertise we have acquired over time, our technology has been continuously enhanced, while our new relevant patents supplement it. Our in-house production also allows us to implement customer demands quickly and unimpeded, while ensuring our quality standards at the same time.

Compatible coil modules

CT-U-coils

For a variety of demanding Industrial applications

SE-coils

Optimized for productive and efficient demagnetization in the industrial component cleaning

VE-High performance coils

High field strengths through individual design, for demanding demagnetization tasks at low residual magnetism limit values and deep demagnetization

RE-coils

Optimized to efficiently demagnetize bars and tubes in the production line

DS-coils

Optimized for productive and efficient demagnetization of surfaces of hard-to-reach components such as railroad rails or large rolling bearings

Technical data*

Power module		DN 750-Int	DN 1100-Int	DN 1850-Int
Dimensions mounting plate (mm)	W	575		
	H	570		
	D	310		
Power supply	VAC	3PE 380–480		
	Hz	50/60		
Control connection	V	24		
	Hz	DC		
		1A fuse for control, 4A fuse for fan, 1A fuse for fieldbus coupler		
Weight	kg	18	20	25
Peak current ^{1,2}	A	36	52	80
Internal fuse	A	20		
Connection		Standard with fieldbus coupler via Profibus, Ethernet, Profinet, CANopen or other protocols (to be defined when ordering). Alternatively, digital inputs and outputs are available.		

Options

- › Process monitoring
- › Safety function STO (Safe Torque Off)
- › Power selection (3 levels)
- › UL approved material

¹ Effective value lower by a factor of 1.41, ² In continuous operation it is 2 times lower

* All informations are without guarantee



NDT Supply.com, Inc.

7952 Nieman Road
Lenexa, KS 66214-1560 USA

Phone: 913-685-0675, Fax: 913-685-1125
e-mail: sales@ndtsupply.com, www.ndtsupply.com

