

HLE + DM

Customized **high-performance** demagnetizer



- > The maximum field strength combined with highly precise pulse control positions this series on the leading edge of the Maurer Degaussing® technology
- > High-performance demagnetizing coils with field strengths exceeding 400 kA/m
- > Power modules with up to 200 kW demagnetizing performance
- > The demagnetizing solution is tailored optimally for each particular application with the aim of increased efficiency
- > For demanding demagnetization tasks of hard-to-demagnetize components, for which process-reliable adherence to the limit values relating to residual magnetism is a must
- > Customized process automation
- > Productive demagnetization of large bulk materials or heavy individual parts using highly precise pulse control
- > In traditional coils, electric current is converted into magnetic field strength with a very unfavorable reactive current ratio. The drawn energy is nearly fully converted into active power in the HLE series



Swiss Made

NDT Supply.com, Inc.

7952 Nieman Road
Lenexa, KS 66214-1560 USA

Phone: 913-685-0675, Fax: 913-685-1125



Maurer Magnetic

Magnetically pure

In state-of-the-art industrial production processes, the standard requirements for magnetism limit values on ferromagnetic components are between 2 A/cm and 4 A/cm, such as for precision cleaning or electron beam welding, in which smooth processes cannot be reached without the lowest magnetism values. It is essential for a trouble-free production chain that consideration is also given to magnetism. The very high field strengths of the HLE allow a complete demagnetization of components as process preparation, because they no longer re-magnetize themselves on their own.


The HLE+DM high-performance demagnetizers represent leading edge demagnetizing systems: maximum demagnetizing performance coupled with high throughput. Demagnetize filled parts carriers, transport baskets or complex assemblies with a

pulse lasting only a few seconds – and in a quality that up until now has been unrivaled. With the powerful and brief demagnetizing pulse, the tailor-made coil opening and the field strength designed for each specific case separately, the energy requirement of the demagnetizing process is kept as low as possible.

In 2001, Maurer Magnetic developed the Maurer Degaussing® demagnetizing process, for which a patent was applied for. With our many years of experience and the expertise we have acquired over time, our technology has been continuously enhanced, while our new relevant patents supplement it. Our in-house production also allows us to implement customer demands quickly and unimpeded, while ensuring our quality standards at the same time.

Applications

Demagnetization with high-performance coils

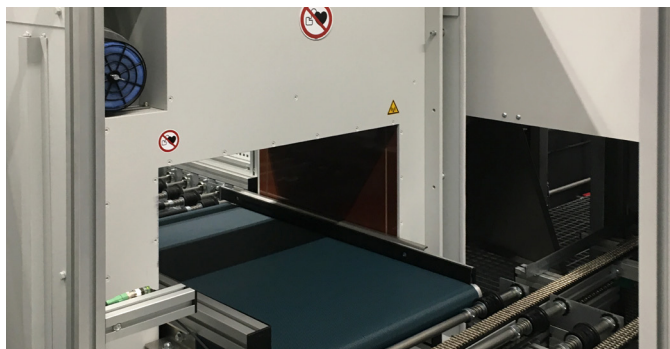

Fully-integrated HLE coil module



Automatically actuated DM power module

The demagnetizer is designed specifically to be integrated into highly automated production processes in an industrial environment. The excellent demagnetizing performance makes this device the leading-edge demagnetizer in industrial environments.

The magnetic field, which depending on the need, can release a field strength exceeding 400 kA/m, nearly completely demagnetizes hard-magnetic materials, internal parts in assemblies or large bulk quantities in no time at all.

The HLE high-performance coil module is ideally sized to match the customer-specific application in terms of its performance and the dimensions of the active opening. The Maurer Degaussing® process and the effective air cooling provide for a high clock rate and productivity. The housing is made of a rugged, fully-insulating material.

Ideally tailor-made demagnetizing solution

The demagnetization parameters are determined in preliminary testing or based on experience from similar scenarios. The demagnetization solution is implemented promptly with optimally designed power and coil modules.

Range of parts

- > The most demanding components with the highest demagnetization requirements
- > Large, filled laundry baskets for improved cleanliness
- > Tools, small parts in bulk
- > Assemblies consisting of a variety of materials
- > Built-in hard metal parts



Increased productivity with the ability to demagnetize many parts at once. Bulk material, transport containers with content or even complex individual parts are demagnetized with a pulse



7952 Nieman Road, Lenexa, KS 66214-1560 USA
Phone: 913-685-0675, Fax: 913-685-1125
www.ndtsupply.com, sales@ndtsupply.com

Cutting-edge technology

For highest requirements



The DM high-performance modules consist of the power and control components needed to operate the fixed coil modules.

DM 86–450 Power Module


- > Patented pulse demagnetizer, which guarantees that the material is demagnetized all the way into the core
- > Can be easily connected into automated production lines thanks to 24 V I/O interface
- > Interface for a trigger sensor for autonomous pulse triggering comes standard
- > Operating status lights
- > Intuitive, reliable operation
- > Demagnetization in pulse mode
- > Robust design suitable for industrial applications
- > Reactive current compensated



Maurer Degaussing® technology


The Maurer Degaussing® process works with pulse demagnetization patented by Maurer. The intensity, amount and precision of the polarity reversals, and the frequency are implemented in an optimum manner by the Maurer-Degaussing® procedure. This package enables demagnetisation that cannot be performed with conventional methods:

1. Short-term high magnetic field strength
2. High number of monotonically decreasing vibrations
3. Run-out exactly to zero magnetic field

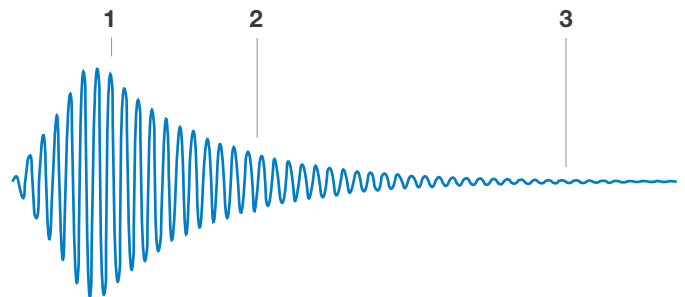

FMT® – Field Multiplier Technology

The efficiency of the demagnetising process is implemented directly and used to the full with this technology. The electrical switching used to generate the high field multiplies the current that is fed in and therefore provides high demagnetisation field power. The FMT® (Field Multiplier Technology) solves this problem and enables higher field strengths while keeping the electrical connection power lower at the same time.

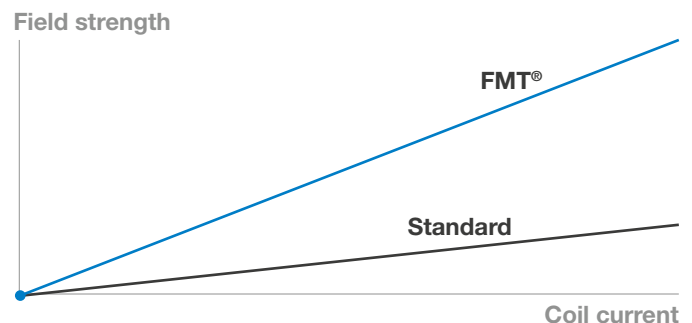

NDT Supply.com, Inc.
7952 Nieman Road
Lenexa, KS 66214-1560 USA

Phone: 913-685-0675, Fax: 913-685-1125
e-mail: sales@ndtsupply.com, www.ndtsupply.com



Technical data*

High-performance demagnetizer		HLE
Customer-specific external dimensions (mm)	W	max. 1730
	H	max. 1930
	D	max. 1100
Customer-specific active opening (mm)	W	max. 1500
	H	max. 1500
	D	max. 1000
Weight	kg	Typically 80 to 800
Degree of protection IP		20
Maximum field strength ¹	kA/m	Typically 100 to over 400, inversely proportional to the active opening
Cycle time		Typically 2 to 6 pulse/min
Demagnetizing frequency		Designed customer-specific

Power module		DM 86	DM 110	DM 140	DM 200	DM 450
External dimensions (mm)	W	1000				1200
	H	1400				2200
	D	400				400
Power supply	VAC Hz	3PE 380–480 50/60				
Weight	kg	100	120	125	130	150
Degree of protection IP		53				
Peak current ^{1,2}	A	121	155	197	282	635
Internal fuse	A	63				125
Suitability for automation		Yes				

Options

- > Process monitoring
- > Power selection (3 levels)
- > Shielding chamber
- > Fieldbus coupler WAGO or Beckhoff
- > UL approved material
- > Special requirements on request

Delivery includes

- > HLE + DM



¹ Effective value lower by a factor of 1.41, ² In continuous operation it is 1.5 times lower

* All informations are without guarantee



NDT Supply.com, Inc.

7952 Nieman Road
Lenexa, KS 66214-1560 USA

Phone: 913-685-0675, Fax: 913-685-1125

e-mail: sales@ndtsupply.com, www.ndtsupply.com

