

## Tool Videoscope

### VT350 Series



1280x720 Mega HD Image



3.5 inches IPS HD full-view display



Car front face design button



Aircraft engine streamlined design joystick



**NDT Supply.com, Inc.**

7952 Nieman Road  
Lenexa, KS 66214-1560 USA

Phone: 913-685-0675, Fax: 913-685-1125  
e-mail: [sales@ndtsupply.com](mailto:sales@ndtsupply.com), [www.ndtsupply.com](http://www.ndtsupply.com)






Joystick control



360° accurate articulation


Joystick-control 360° accurate articulation

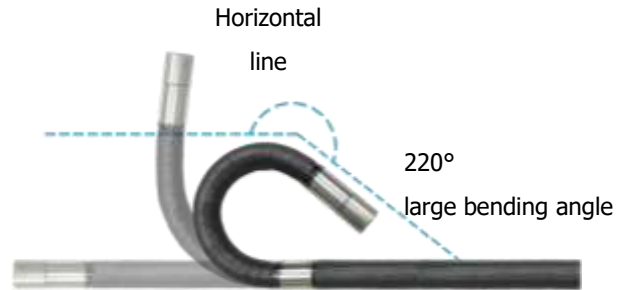

220° large bending angle, ensure to inspect every corner of detected object



Insert hole diameter  $\approx$  pen diameter

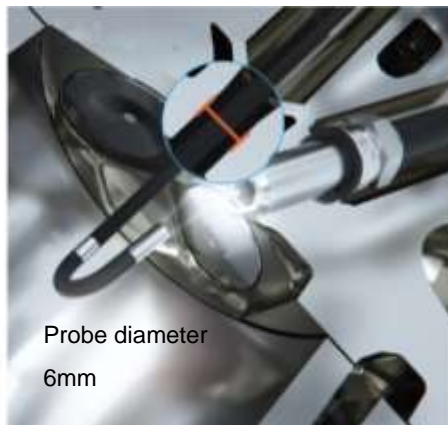


Probe diameter 6mm

It can insert and inspect as long as there are holes or gaps



Super bright ceramic light with 0-5 levels control

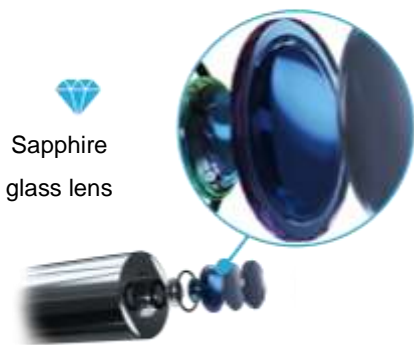

Sapphire glass lens

Over-heat protection



working on normal temperature

Sapphire glass lens, high precision probe

Wireless image transmission



One-click photo/video taking, real-time wireless image transmitting



intelligent image-process system  
simple operating logic

Iconic menu, easy operation



Light and portable only 0.5KG



Tube • IP67  
Product body • IP65


The whole product is dust-proof and water-proof



Anti-fall engineering alloy materials

Tungsten-alloy braided tube

Excellent quality, anti-fall and wear-resistant

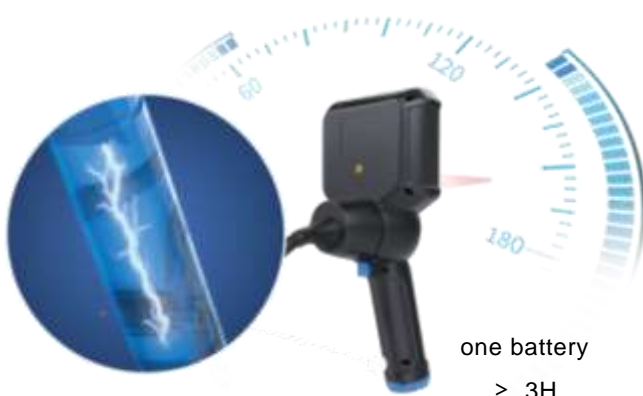

one battery  
≥ 3H

Super long working time



Optional accessories

**NDT Supply.com, Inc.**  
7952 Nieman Road  
Lenexa, KS 66214-1560 USA

Phone: 913-685-0675, Fax: 913-685-1125  
e-mail: [sales@ndtsupply.com](mailto:sales@ndtsupply.com), [www.ndtsupply.com](http://www.ndtsupply.com)



**Technical Specification:**

<b>Tool Videoscope</b>			
	Model	VT350-60-100	VT350-60-150
	Code#	350-60-100T	350-60-150T
Tube System	Tube Length	1m	1.5m
	Probe Diameter(mm)	Φ6.0	
	Tube Material	tungsten alloy	
	Camera Pixels	1 mega pixel	
	Image Resolution	1280*720	
	DOF	7~110mm/20-150mm	
	FOV	120°	
	Light Source Material	Ceramic LED light	
	Illumination Level	6-Class: 0~5	
	Illuminance	25000Lx	
	Protecting Device of Durability	80mm buffer protection device on the connection between tube and handle	
	Articulation	360° joystick-control articulation	
	Bending Angle	Maximum: 220°	
	Main Monitor System	Structure	Hand-held integrated design
Display		3.5 inches IPS full-view display	
Zoom In/Out		5X	
Image Effect		Image freezing, cold/warm color	
Image Adjustment		Image sharpness/ contrast/gamma value	
Image/Video Format		JPEG/MP4	
File Storage		Standard TF card: 16G, Maximum: 64G	
Data Port		HDMI video output, Micro USB port	
Wireless Image		WIFI (optional)	
Battery		Detachable & rechargeable lithium battery	
Battery Capacity		3.7V, 3200mAh	
Battery Working Time		≥3H	
Battery Charge		DC 5V/1A	
Outer Case Material		Anti-fall engineering alloy material	
Water/Dust Proof		Probe/tube: IP67; monitor: IP65	
Weight	≈0.5KG		
Accessories	Standard Configuration	Instrument case/ videoscope/ battery card reader/ TF	
	Optional	Extendable pole: 0.35-1.8m/mini HDMI cable/ foldable tripod	

**NDT Supply.com, Inc.**

7952 Nieman Road  
Lenexa, KS 66214-1560 USA

Phone: 913-685-0675, Fax: 913-685-1125  
e-mail: [sales@ndtsupply.com](mailto:sales@ndtsupply.com), [www.ndtsupply.com](http://www.ndtsupply.com)

