



NEW


WELL PLANNED INSPECTION

**START QUICKLY &
CHECK THOROUGHLY**

**The new Wöhler VIS 750
HD Inspection Camera**



Made in Germany

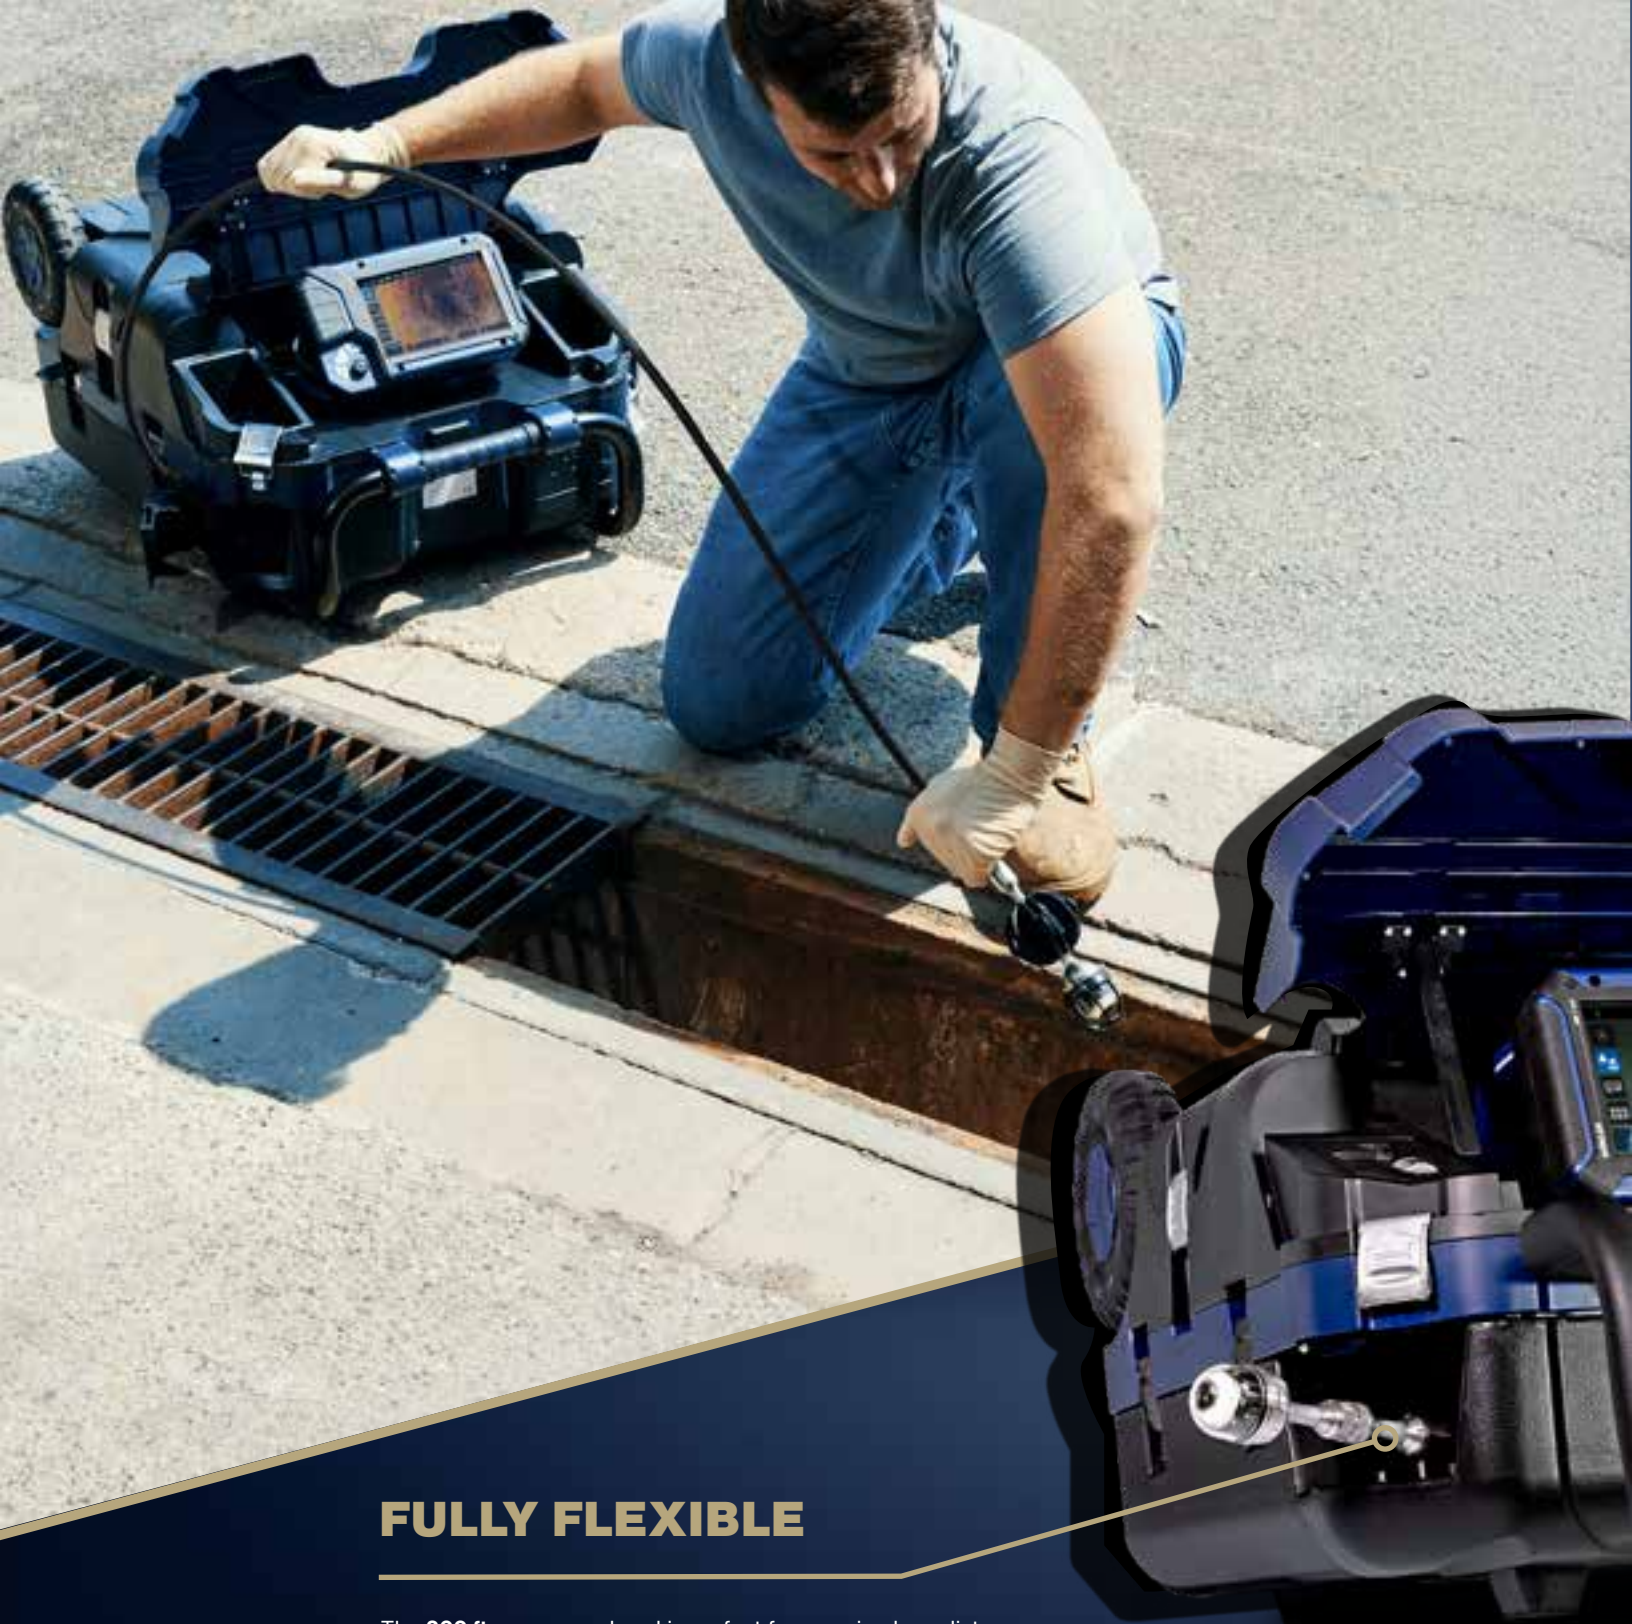

FULLY FLEXIBLE

The **200 ft** camera push rod is perfect for covering long distances in sewers, while the **130 ft** push rod works well for navigating multiple bends in pipework.

EVERYTHING IS TO HAND

The Wöhler VIS 750 HD Inspection Camera is versatile enough for any task, thanks to its multiple setup options. Plus, the trolley's flexible handle makes transport easy and convenient.

EVERY DETAIL CONSIDERED

With the Wöhler VIS 750 HD Inspection Camera, no pipe is too long and no corner too dark. You can easily spot even the tiniest leaks, the toughest blockages, and annoying root ingrowth. The easy-to-use design lets you get things done fast and effectively, because we understand that your time is super valuable. The Wöhler VIS 750 HD Inspection Camera stands out with its clever features, making it one-of-a-kind.

FLEXIBLE MONITOR COVER

The removable front flap is also an integrated glare shield.

REMOVABLE MONITOR

Do you require both hands for the inspection? The HD monitor can be easily detached. You can stick it to magnetic surfaces or use the stand to set it up wherever you need it.

RELIABLE ASSISTANT

You should not be squeamish during the inspection. The trolley ensures the technology is safe throughout the process. The flaps come with a break-resistant feature and can be easily detached.

CLEAN WORK

The camera push rod, which is built into the trolley, is simple to maintain: After you're done using it, just take a cloth and wipe down both the camera push rod and the camera head. For a deeper clean, you can easily detach the reel and give it a rinse with a water hose.



HD



DESCRIPTION OF DAMAGE & VOICE COMMENTS

In the photos, a comment function allows you to insert a description of the damage. It is also possible to add voice comments to videos.

EXACT LOCALIZATION

The transmitter which is built into the pan and tilt camera head makes it simple and accurate to find it using the Wöhler L 200 Locator.

ILLUMINATE THE INSPECTION AREA

The brightly lit camera heads ensure that even the tiniest flaws are easily spotted. Looking for even more brightness? With the optional additional light ring, even obscured areas are made visible too!

ALL YOU NEED TO SEE AT A GLANCE

A versatile camera featuring an interchangeable head system designed to detect even the tiniest hairline cracks. You can choose between a Ø 1.5" HD pan and tilt head or a Ø 1" HD miniature camera head. With the new VE probe adapter, your tried-and-tested system becomes a fully-fledged borescope.

FOCUS ON WHAT IS IMPORTANT

Focus on assessing the damage rather than managing the camera: The HD touchscreen and joystick make it easy to operate the camera intuitively. This setup enables you to access difficult areas and capture crystal-clear images, thanks to the adjustable focus range and focus feature. Additionally, damage descriptions and voice comments as image /video supplements are possible.

NO MORE TWISTED IMAGES

Even with angled pipe sections, the self-leveling feature ensures that your image always remains horizontal. This allows you to maintain a clear view everywhere and reliably detect any damage.



DIGITALLY ON THE MOVE

Discover the convenience of digital inspection using the free Wöhler Video Inspection App. View live inspection footage on your smartphone or tablet, tweak image settings within the app, and easily generate digital reports on-site that can be sent straight to clients, your office, or the insurance company.



YOUR PERFECT SYSTEM

Wöhler VIS 750 HD Inspection Camera **HD camera head Ø 1.5" | 130 ft push rod**

Article no. 11763

Wöhler VIS 750 HD Inspection Camera **HD camera head Ø 1.5" | 200 ft push rod**

Article no. 11755



Accessories



Wöhler L 200 Locator

Article no. 7430



Wöhler HD miniature camera head Ø 1"

Article no. 25470



Wöhler Light Ring HD 1"/1.5"

Article no. 11623



Guidance Sleeve for camera head Ø 1"

Article no. 3827



Protection Sleeve with cutout

Article no. 2641



Camera Roller Guide

Article no. 3681



Adapter Wöhler VE Probes

Article no. 11543

TECHNOLOGY AT A GLANCE

Full System in a Trolley

Dimensions:	15.3 x 22 x 27.6 in
Weight:	57 lb

Wöhler HD Pan & Tilt Camera Head

Diameter:	Ø 1.5"
Resolution:	1,280 x 720 px
Degree of protection:	Waterproof IP 67
Light source:	White LEDs (10 pieces)

Wöhler HD Miniature Camera Head

Diameter:	Ø 1"
Resolution:	1,280 x 720 px
Degree of protection:	Waterproof IP 68
Light source:	White LEDs (10 pieces)

Monitor

TFT-Display:	7" / 16:9 Format
Resolution:	1,280 x 800 px
Battery operating time:	4 h
Dimensions:	9.8 x 6.1 x 2.1 in (LxWxH)
Memory:	5 GB internal memoryOptional: Storage on USB stick

Camera Push Rods

130':	Rod dimensions Ø 0.43" Areas of application starting from NPS 3 pipes
200':	Rod dimensions Ø 0.43" Areas of application starting from NPS 3 pipes

Other
inspection cameras



Wöhler VIS 750
HD Inspection Camera

- ✗ Camera head only looks straight ahead
- ✗ Monitor unit, camera and reel must be connected manually before each inspection
- ✗ Open reel/reel systems contaminate the application site after use
- ✗ Complicated cleaning of camera head and rod, as the spring on the camera head collects dirt and can get stuck in the tube
- ✗ The components of the inspection cameras must be stowed and transported individually
- ✗ Service repair times of several weeks

- ✓ Pan and tilt HD camera head with additional motorized focus
- ✓ Ready for immediate use: Set up, switch on and get started
- ✓ The trolley leaves your working environment clean: Simply stow the camera push rod in the trolley after inspection
- ✓ Easy cleaning: Camera head and push rod only need to be wiped down and are ready for the next use
- ✓ The compact trolley contains everything you need for your inspection: The camera, monitor and reel have their fixed place. You can easily stow a second camera head or the Wöhler L 200 Locator in the accessory compartment
- ✓ Service orders are completed in just 5 business days



WÖHLER



NDT Supply.com, Inc.
7952 Nieman Road
Lenexa, KS 66214-1560 USA
Phone: (913)-685-0675
Email: sales@ndtsupply.com