

XRS Graphic Display Series

Making the unseen seen



Pulsed X-ray Advantages


Penetrating power in a small container

Utilitarian design - DeWalt battery, tripod mounts, picatinny rail, removable top plate

Lightweight - less than 20 lbs

Safety - no radioactive material, minimal leakage, short exposure time

Easy to use - One input variable

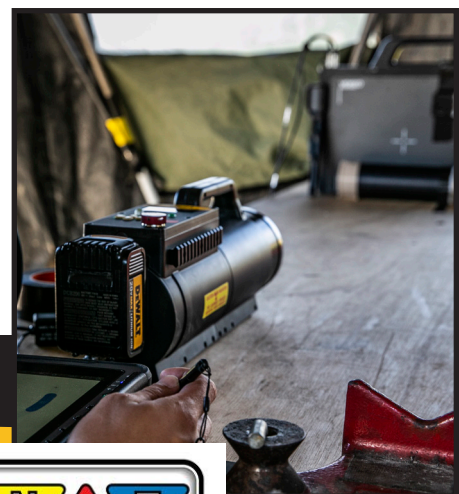

NDT Supply.com, Inc.
7952 Nieman Road
Lenexa, KS 66214-1560 USA

Phone: 913-685-0675, Fax: 913-685-1125
e-mail: sales@ndtsupply.com, www.ndtsupply.com



All-New Graphic Display




Lemo connector above battery for easier access



- Larger text and graphics
- Viewable in direct sunlight
- Colored text and backlight
- Extended temperature range



- Help button – access on-board context-sensitive help



- QR Code - access additional information online

Integrated Arca Swiss tripod mount



	XRS3	XRS4
Dimensions (with battery)	L: 15.42" (39.17 cm)	L: 19.26" (48.92 cm)
(with Picatinny Rails)	W: 4.26" (10.82 cm)	W: 4.80" (12.19 cm)
(without key)	H: 5.83" (14.81 cm)	H: 7.05" (17.91 cm)
Weight (with battery)	11.80 lbs. (5.40 kg)	18.30 lbs (8.30 kg)
Average Output Dose*	3 mR per pulse	5 mR per pulse
Pulse Rate	21 pulses per second	9 pulses per second
Pulses per Battery charge	5500	3000
Operating Temperature	-4 to 158 °F (-20 to 70 °C)	-4 to 158 °F (-20 to 70 °C)
IP Rating	IP 54	IP 54

*Dose measured at 12" (30 cm) from source

Golden Engineering
Portable X-ray Technology

Celebrating 50 Years

of supplying quality products,
providing extraordinary service,
improving portable X-ray technology,
and being family-owned and operated.