
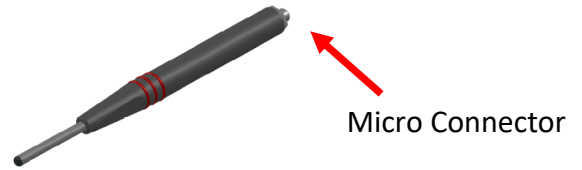


**Straight - Absolute with plastic handle coding:**

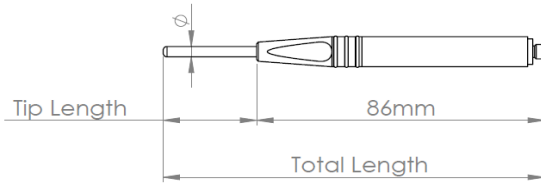

**Standard**

ETHer NDE Part No.	Centre Frequency	Tip Length (Total Length)	ØTip	Type
<b>Probe, Shielded, Plastic Handle, Straight:</b>				
<b>PS200PS028-114N</b>	200kHz	28mm Tip Length (Total Length 114mm, 4.5") (Straight Shank)	4.45	Absolute
<b>PS200PS028-114F</b>	200kHz	28mm Tip Length (Total Length 114mm, 4.5") (Straight Shank)	3.30 (Fine)	Absolute
<b>PS500PS028-114N</b>	500kHz	28mm Tip Length (Total Length 114mm, 4.5") (Straight Shank)	4.45	Absolute
<b>PS500PS028-114F</b>	500kHz	28mm Tip Length (Total Length 114mm, 4.5") (Straight Shank)	3.30 (Fine)	Absolute
<b>PS002PS028-114N</b>	2MHz	28mm Tip Length (Total Length 114mm, 4.5") (Straight Shank)	3.30	Absolute
<b>PS002PS028-114F</b>	2MHz	28mm Tip Length (Total Length 114mm, 4.5") (Straight Shank)	2.34 (Fine)	Absolute
<b>PS006PS028-114N</b>	6MHz	28mm Tip Length (Total Length 114mm, 4.5") (Straight Shank)	2.34	Absolute
Please see matrix below for other options, specials available on request.				

**Other**

**Straight Probe Example: PS200PS028-114N**



PS	Centre Frequency	Handle	Tip Type	Tip Length (mm) - Total Length (mm)	Tip Diameter (mm)
<b>PS</b>	<b>200</b>	<b>P</b>	<b>S</b>	<b>028-114</b>	<b>N</b>
	200 = 200kHz	Plastic	Straight	028-114 = Tip Length 28mm - Total Length 114mm (4.5")	N = Normal (200kHz = Dia 4.45mm)
	500 = 500kHz			048-127 = Tip Length 48mm - Total Length 127mm (5.0")	N = Normal(500kHz = Dia 4.45mm)
	002 = 2MHz			066-152 = Tip Length 66mm - Total Length 152mm (6.0")	N = Normal(2MHz = Dia 3.30mm)
	006 = 6MHz			117-203 = Tip Length 117mm - Total Length 203mm (8.0")	N = (6MHz = Dia 2.34mm)
				168-254 = Tip Length 168mm - Total Length 254mm (10.0")	F = Fine(200k = Dia 3.30mm)
				219-305 = Tip Length 219mm - Total Length 305mm (12.0")	F = Fine(500kHz = Dia 3.30mm)
					F = Fine(2MHz = Dia 2.34mm)

Other variants available on request.

**Leads to fit above probes:**

ETHer NDE Part No.	Description	Instrument	Connector Instrument End	Connector Probe End	Cable Length	Configuration
<b>ALLCX-M02-015A</b>	Lead	WeldCheck/AeroCheck/Vantage/ETi	Lemo Coaxial	Micro Plug	1.5m	Absolute
<b>ALL12-M02-015A</b>	Lead	WeldCheck/AeroCheck/Hocking	Lemo 12-Way	Micro Plug	1.5m	Absolute
<b>ALL07-M02-015A</b>	Lead	Hocking	Lemo 7-Way	Micro Plug	1.5m	Absolute
<b>ALB02-M02-015A</b>	Lead	Various	BNC Plug	Micro Plug	1.5m	Absolute

**Straight – Bridge (IB Tech Inside) with plastic handle coding:**

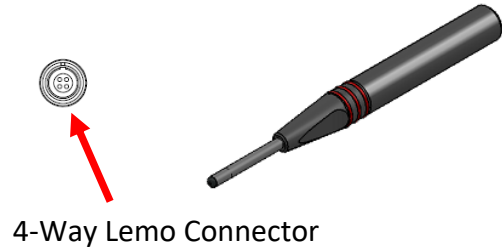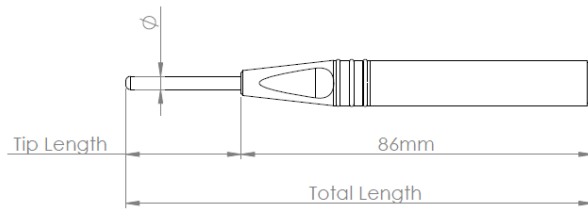

**Standard**

ETHer NDE Part No.	Centre Frequency	Tip Length (Total Length)	ØTip	Type
<b>Probe, Shielded, Plastic Handle, Straight:</b>				
<b>PS200PS028-114NB</b>	200kHz	28mm Tip Length (Total Length 114mm, 4.5") (Straight Shank)	4.45	Bridge
<b>PS200PS028-114FB</b>	200kHz	28mm Tip Length (Total Length 114mm, 4.5") (Straight Shank)	3.30 (Fine)	Bridge
<b>PS500PS028-114NB</b>	500kHz	28mm Tip Length (Total Length 114mm, 4.5") (Straight Shank)	4.45	Bridge
<b>PS500PS028-114FB</b>	500kHz	28mm Tip Length (Total Length 114mm, 4.5") (Straight Shank)	3.30 (Fine)	Bridge
<b>PS002PS028-114NB</b>	2MHz	28mm Tip Length (Total Length 114mm, 4.5") (Straight Shank)	3.30	Bridge
<b>PS002PS028-114FB</b>	2MHz	28mm Tip Length (Total Length 114mm, 4.5") (Straight Shank)	2.34 (Fine)	Bridge
<b>PS006PS028-114NB</b>	6MHz	28mm Tip Length (Total Length 114mm, 4.5") (Straight Shank)	2.34	Bridge
Please see matrix below for other options, specials available on request.				

**Other**

**Straight Probe Example: PS200PS028-114NB**

PS	Centre Frequency	Handle	Tip Type	Tip Length (mm) - Total Length (mm)	Tip Diameter (mm)
<b>PS</b>	<b>200</b>	<b>P</b>	<b>S</b>	<b>028-114</b>	<b>NB</b>
	200 = 200kHz	Plastic	Straight	028-114 = Tip Length 28mm - Total Length 114mm (4.5")	NB = Normal (200kHz = Dia 4.45mm)
	500 = 500kHz			048-127 = Tip Length 48mm - Total Length 127mm (5.0")	NB = Normal (500kHz = Dia 4.45mm)
	002 = 2MHz			066-152 = Tip Length 66mm - Total Length 152mm (6.0")	NB = Normal(2MHz = Dia 3.30mm)
	006 = 6MHz			117-203 = Tip Length 117mm - Total Length 203mm (8.0")	NB = (6MHz = Dia 2.34mm)
				168-254 = Tip Length 168mm - Total Length 254mm (10.0")	FB = Fine(200k = Dia 3.30mm)
				219-305 = Tip Length 219mm - Total Length 305mm (12.0")	FB = Fine(500kHz = Dia 3.30mm)
					FB = Fine(2MHz = Dia 2.34mm)

Other variants available on request.

**Leads to fit above probes:**

ETHer NDE Part No.	Description	Instrument	Connector Instrument End	Connector Probe End	Cable Length	Configuration
<b>ALFTRI-L04-015</b>	Lead	Victor/Veritor	Fischer Triax	Lemo 4-Way Plug	1.5m	Bridge
<b>ALL12-L04-015B</b>	Lead	WeldCheck/ AeroCheck/ Vantage/ETi	Lemo 12-Way	Lemo 4-Way Plug	1.5m	Bridge
<b>ALL07-L04-015B</b>	Lead	Hocking	Lemo 7-Way	Lemo 4-Way Plug	1.5m	Bridge