


North American Standard

- Low height probes, suitable for narrow and limited detection environments
- Side Mounting with 1.8 meter cable length, cable end with Lemo 01(C9), or BNC(Q9) connectors(optional)

Dimensions									
Specification		A		B		C		D	
mm	in	mm	in	mm	in	mm	in	mm	in
6	0.25	12.0	0.47	16.5	0.65	9.5	0.37	22.0	0.87
10	0.375	16.0	0.63	16.5	0.65	12.0	0.47	22.0	0.87
13	0.50	19.5	0.77	17.0	0.67	15.5	0.61	22.0	0.87

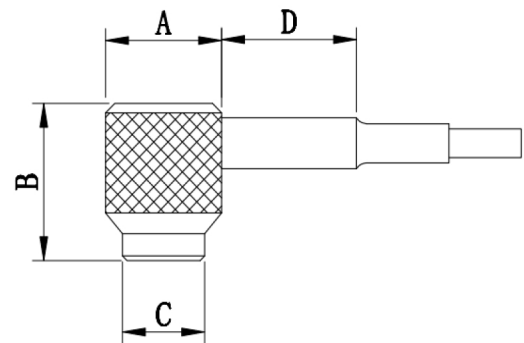

Specification						
Frequency	Diameter		Models			
			Cable End with BNC		Cable End with Lemo 01	
MHz	mm	in	PL	C	PL	C
2.25	6	0.25	DA3-2.25P6-B	DA3-2.25C6-B	DA3-2.25P6-1	DA3-2.25C6-1
	10	0.375	DA3-2.25P10-B	DA3-2.25C10-B	DA3-2.25P10-1	DA3-2.25C10-1
	13	0.50	DA3-2.25P13-B	DA3-2.25C13-B	DA3-2.25P13-1	DA3-2.25C13-1
3.5	6	0.25	DA3-3.5P6-B	DA3-3.5C6-B	DA3-3.5P6-1	DA3-3.5C6-1
	10	0.375	DA3-3.5P10-B	DA3-3.5C10-B	DA3-3.5P10-1	DA3-3.5C10-1
	13	0.50	DA3-3.5P13-B	DA3-3.5C13-B	DA3-3.5P13-1	DA3-3.5C13-1
5	6	0.25	DA3-5P6-B	DA3-5C6-B	DA3-5P6-1	DA3-5C6-1
	10	0.375	DA3-5P10-B	DA3-5C10-B	DA3-5P10-1	DA3-5C10-1
	13	0.50	DA3-5P13-B	DA3-5C13-B	DA3-5P13-1	DA3-5C13-1
7.5	6	0.250	DA3-7.5P6-B	DA3-7.5C6-B	DA3-7.5P6-1	DA3-7.5C6-1
	10	0.25	DA3-10P6-B	DA3-10C6-B	DA3-10P6-1	DA3-10C6-1

