

HARD TEST-II

A new combined tester for Hardness and sigma break tests in one instrument: quick and accurate for production departments without requiring laboratory inspection.



- Conform with standard **ASTM B-724 - DIN 50157**
- An invaluable help in the warehouse or factory
- Tests hardness on all type of metals
- Tests the break module sigma
- Does not require adjustment
- Ready for test in any moment
- 10 different conversion scales
- Stores results
- Statistics and data output for printer or PC connection
- Acoustic signal



NDT Supply.com, Inc.
7952 Nieman Road
Lenexa, KS 66214-1560 USA

Phone: 913-685-0675, Fax: 913-685-1125
e-mail: sales@ndtsupply.com, www.ndtsupply.com



AFFRI

FIELDS OF APPLICATION FOR AFFRI® TESTERS

	Soft	Hard	
HRA - Rockwell A	20	92	For hard steel, nitriding, cementation, roller, steel for tools, soft and hard materials
HK - Knoop	25	97	For soft steel, non ferrous metals
HRC - Rockwell C	0	80	For hard steel, nitriding, cementation, roller, steel for tools
HRB - Rockwell B	26	100	For soft steel, non ferrous metals
HR30T - Rockwell 30T	16	83	For soft steel, non ferrous metals
HB5 - Brinell 5	5	205	For aluminium, soft aluminium alloy cast iron, bronze, brass
HB30 - Brinell 30	66	884	For heat treated steel, annealed steel, drawn products, deep-drawn strip
HV - Vickers	13	1865	For all material
R - Tensile module N/mm ²	226	2898	For heat treated steel, annealed steel, drawn products, deep-drawn strip
HR15N - Rockwell HR15N	69	93	For hard steel, nitriding, cementation, roller, steel for tools

QUICK: in only 2 seconds the hardness and sigma are measured on large range of metallic products

UNIVERSAL: designed to check sheets, metal rolls, shaped parts, tubes, on aluminium, brass, copper and steel


ACCURATE: products and surfaces down to 0.08 mm thick can be checked. It works using the innovative Affri system which measures the real indentation depth applying constant incremental load rates through a minor and major load (as in laboratory machines).

TECHNICAL CHARACTERISTICS

Height capacity	self adjustable from 0.08 to 15 mm (other measures on request)
Conform to Standard	ASTM B-724 - DIN 50157
Reading scales	HRA HK HRC HRB HB30T HB5 HB30 HV R HR15N
Depth capacity	25 mm
Power	battery
Memory	500 data+ statistic, RS 232C out-data for printer or PC connection

APPLICABLE ACCESSORIES

Standard	Bag with instrument, test block, instruction for use
Extra	Printer with cable Special bases for special fixtures

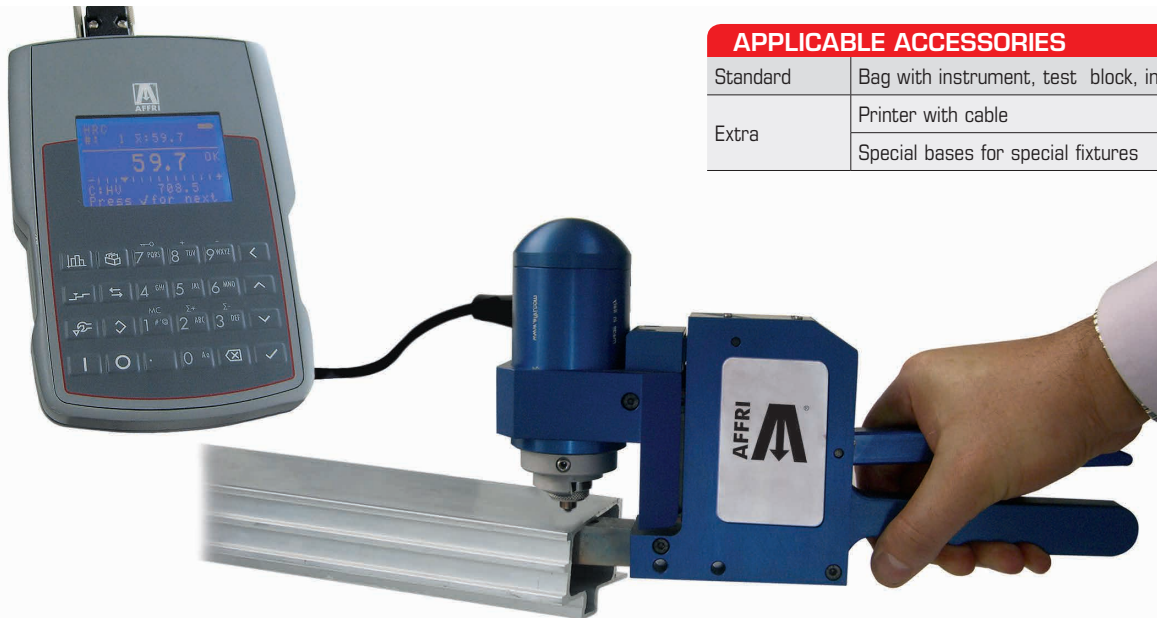

NDT Supply.com, Inc.
7952 Nieman Road
Lenexa, KS 66214-1560 USA

Phone: 913-685-0675, Fax: 913-685-1125
e-mail: sales@ndtsupply.com, www.ndtsupply.com

