


LCNDT Overhead UV LED Panel Series

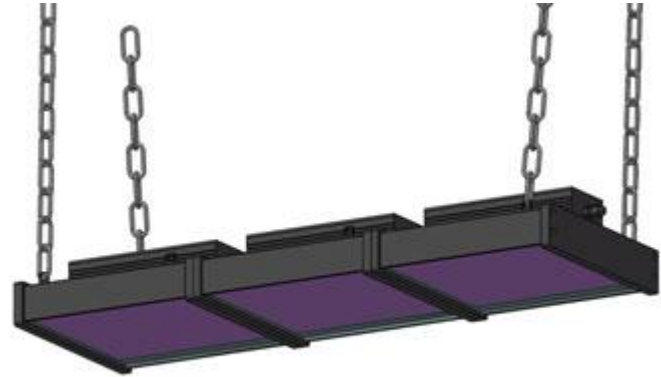

36 UV LED
12 White LED

Features:

- High Intensity of 9,000 $\mu\text{W}/\text{cm}^2$ @ 15"
- Normal Intensity of 6,000 $\mu\text{W}/\text{cm}^2$ @ 15"
- Certified 365nm UV-A
- ASTM E1417, ASTM E1444, ASTM E2297, ASTM E3022 compliant
- Six standard models
- UV / White LED Switch
- Can expand coverage up to 47" / 1200mm
- Works continuously with low heat
- Rugged design
- Lamp will automatically shut-down if the voltage is beyond a normal range to preserve the LEDs and won't turn back on until the voltage is back to a normal range.
- IP65
- 3 Year Warranty and CE marked

Specifications:

UV Intensity	Low Intensity: 6,000 $\mu\text{W}/\text{cm}^2$ @ 15" High Intensity: 9,000 $\mu\text{W}/\text{cm}^2$ @ 15"
Visible White Light:	≤ 0.3 Foot Candles (3 Lux)
Power:	115 – 240 VAC / 50 – 60 Hz
Power Consumption:	40W
Weight:	4.85 lbs. / 2.2 Kg.

Dimensions:	9" x 8.3" x 3.5" / 230 x 212 x 90mm
--------------------	-------------------------------------

12 UV LEDs and 4 White Light LEDs



Standard Coverage Area	Standard Intensity	Maximum Coverage Area	Maximum Intensity
360 x 320mm	6,400 $\mu\text{W}/\text{cm}^2$ @ 15"	380 x 340mm	9,600 $\mu\text{W}/\text{cm}^2$ @ 15"
340 x 300mm	4,200 $\mu\text{W}/\text{cm}^2$ @ 25"	360 x 310mm	6,100 $\mu\text{W}/\text{cm}^2$ @ 25"
340 x 280mm	3,900 $\mu\text{W}/\text{cm}^2$ @ 30"	360 x 300mm	5,400 $\mu\text{W}/\text{cm}^2$ @ 30"
300 x 240mm	3,200 $\mu\text{W}/\text{cm}^2$ @ 35"	320 x 260mm	4,600 $\mu\text{W}/\text{cm}^2$ @ 35"


36 UV LEDs and 12 White Light LEDs



Standard Coverage Area	Standard Intensity	Maximum Coverage Area	Maximum Intensity
360 x 640mm	6,400 $\mu\text{W}/\text{cm}^2$ @ 15"	380 x 680mm	9,600 $\mu\text{W}/\text{cm}^2$ @ 15"
340 x 600mm	4,200 $\mu\text{W}/\text{cm}^2$ @ 25"	360 x 620mm	6,100 $\mu\text{W}/\text{cm}^2$ @ 25"
340 x 560mm	3,900 $\mu\text{W}/\text{cm}^2$ @ 30"	360 x 600mm	5,400 $\mu\text{W}/\text{cm}^2$ @ 30"
300 x 480mm	3,200 $\mu\text{W}/\text{cm}^2$ @ 35"	320 x 520mm	4,600 $\mu\text{W}/\text{cm}^2$ @ 35"

NDT Supply.com

7952 Nieman Road
Lenexa, KS 66214 USA

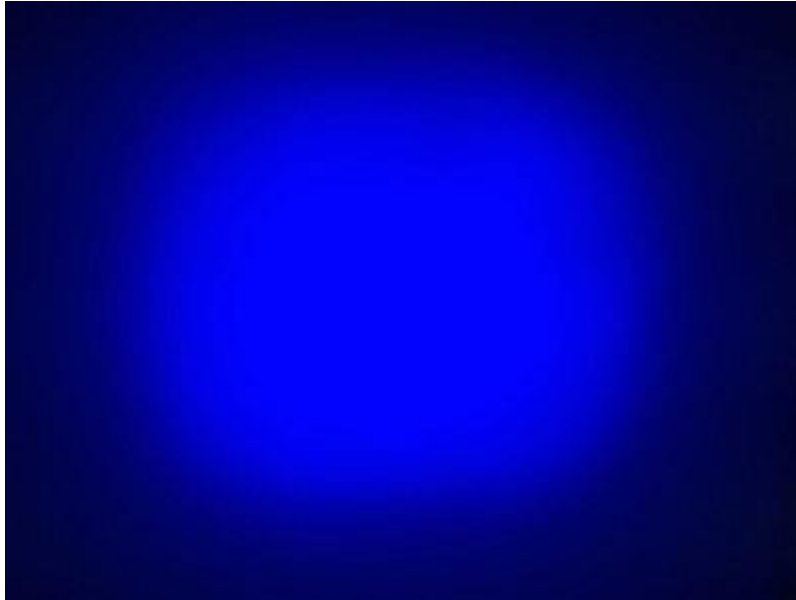

Standard Package Includes:

- UV Panel
- UV Absorbing Spectacles
- AC Adapter with 10-foot (3.0m) cable

Phone: 913-685-0675
Fax: 913-685-1125

sales@ndtsupply.com
www.ndtsupply.com