




# Mi-Glow®

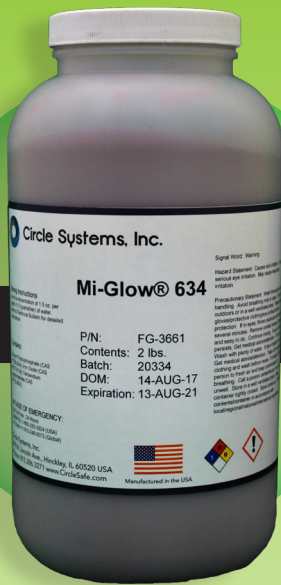

## Mi-Glow® 634

### Physical Characteristics

Red powder with a slight detergent odor.

### Particle Certification

Particles meet or exceed all relevant industry specifications. Certification is included with each shipment.

### Particle Color

Red

### Average Particle Size

12 µm

### AMS Standard

Not applicable.

### SAE Sensitivity

Not applicable.

### Temperature Range

32-120°F (0-49°C)

### Related Product Information:

Safety Data Sheet  
Technical Bulletin 283

### Item #

FG-3661  
FG-3662

### Package Size

2 pounds/jar  
30 pounds/pail

Mi-Glow® 601 red particles premixed with powdered Wetting Agent 34 for use in water media. It is designed to be used with visible light for detecting discontinuities found in structural fabrications and weldments. Higher particle concentration provides heavier indication buildup for easy detection. Mi-Glow® 634 can be further enhanced when used with a UV-A light or blue light.

**NDT Supply.com, Inc.**

7952 Nieman Road  
Lenexa, KS 66214-1560 USA

Phone: 913-685-0675, Fax: 913-685-1125  
e-mail: [sales@ndtsupply.com](mailto:sales@ndtsupply.com), [www.ndtsupply.com](http://www.ndtsupply.com)

