



ACCESSORIES

1. Replaceable probes of different construction and load.
2. Special head "U-459" for easier probe positioning on complex surfaces.
3. Connection cables.

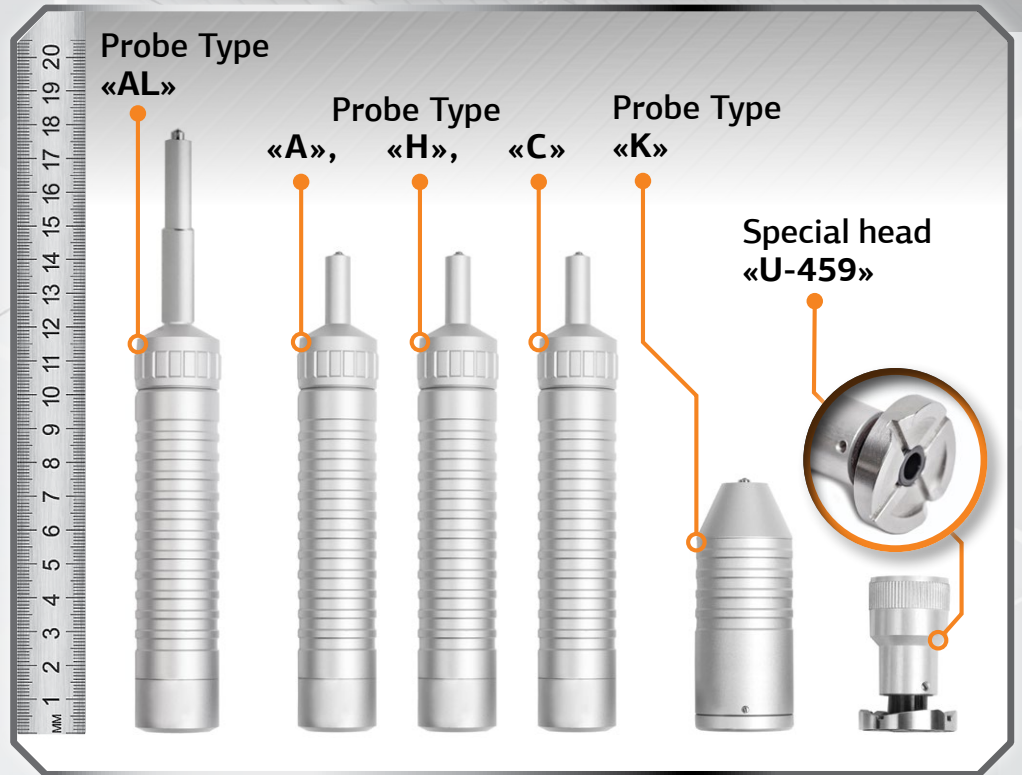

PROBES CHARACTERISTICS

Probe Type	Load	Length, mm	Diameter, mm	Application
A	50H (5 kg)	145	26	Solving the bulk of control problems
H	10H (1 kg)	145	26	Galvanic coating hardness control (chrome etc.)
C	100H (10 kg)	145	26	Unprepared surface control
K	50H (5 kg)	76	36	Hardness control in tubes and hard-to-reach spots
AL	50H (5 kg)	176	26	Hardness control in hard-to-reach spots (length of tip 53 mm)

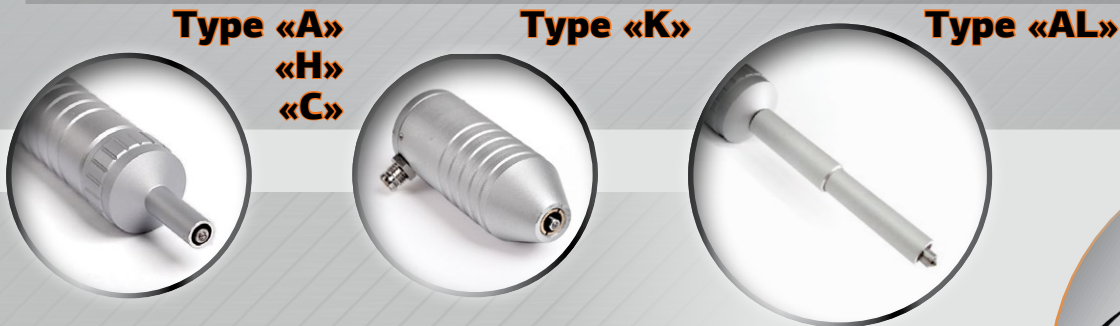

Our hardness testers get only positive feedback from users in the USA, Germany, China, France and other countries.
WORLDWIDE DELIVERY



NDT Supply.com, Inc.
 7952 Nieman Road
 Lenexa, KS 66214-1560 USA

Phone: 913-685-0675, Fax: 913-685-1125
 e-mail: sales@ndtsupply.com, www.ndtsupply.com

