



**LCN<sup>®</sup>DT**

## **Black and White Transmission Densitometer DT-300**

### **Characteristic:**

LED Lighted Table, 5 steps of luminance and 2 areas for selection

High spot luminance, simplifies location of image areas to measure

Program Mode for custom calibration

The densitometer will remain in proper alignment even though it is picked up by the arm

Calibrated to AGFA film strips

Measuring Range: 0 - 5.0D, High Accuracy  $\pm 0.02$  D

No warm-up time

Soft Rubber probe head to protect films

PC Utility Type available(Self recalibration and Add Logs)


# Table Type Digital Densitometer DT-300

## Technical Specifications:


Density: 0.00-5.00 D with 2mm aperture  
0.00-4.00D with 1mm aperture  
Probe Temperature compensated  
Display: 4 digit LED  
Accuracy:  $\pm 0.02$  D  
Resolution: 0.01D  
Repeatability: 0.01D  
Custom calibration range:-0.19 ~ +0.19D (Program Mode)  
Warm up time: No need  
Detector: Silicon photodiode  
Light source: LED  
Power supply: 90V-264V AC / 47-63Hz  
Dimensions: 360mm x 260mm x 120mm  
Weight: 1.7Kg

## Data for reference:

### PHOTODIODE SPECTRAL RESPONSIVITY

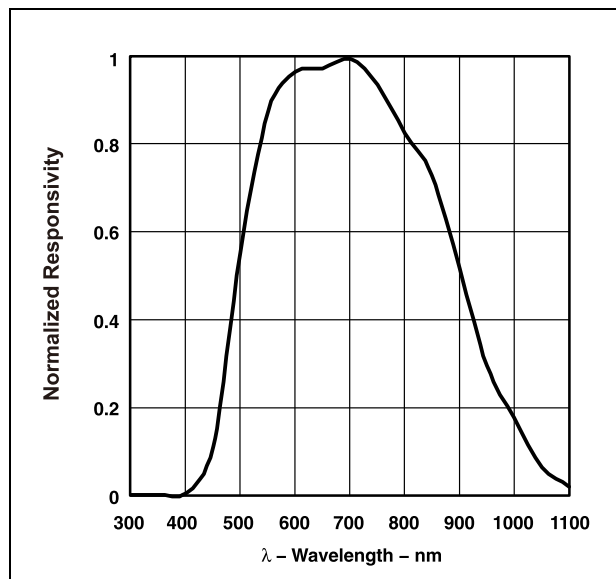

## PC Utility interface(use USB cable connect with PC):

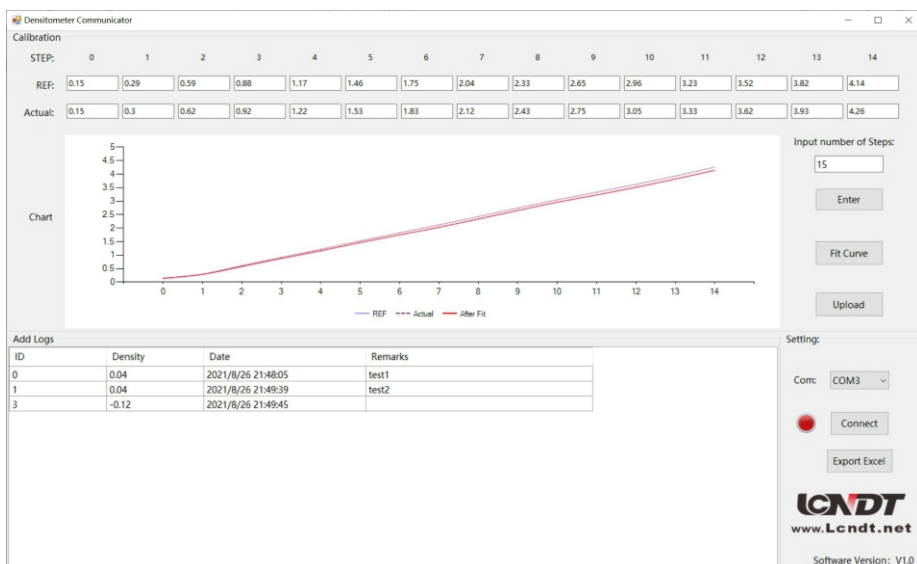

## Standard Components:

Main unit: 1  
Aperature: 3 (1mm, 2mm[default], 3mm)  
Instruction manual (English): 1  
Test Report(English): 1

## Optional Components:

AGFA Density Strip, 15-step, certified  
1m USB Cable (PC Utility type)  
Software(English Version)

You can easily recalibrate your DT-300 with this utility, it fit to any density strips available in market.

\*Support WINDOWS 2000/XP/Server 2003/VISTA/Server 2008/Win7/Win8/Win10 X86/X64 and higher.

# LCNDT®



7952 Nieman Road, Lenexa, KS 66214-1560 USA  
Phone: 913-685-0675, Fax: 913-685-1125  
[www.ndtsupply.com](http://www.ndtsupply.com), [sales@ndtsupply.com](mailto:sales@ndtsupply.com)